



# INSULATING SLEEVING

PVC - TPE - Polychloroprene - Silicone

XIV/21 - 0960 0003 0022 E



**SES-STERLING** <sup>®</sup>  
[www.ses-sterling.com](http://www.ses-sterling.com)





# INSULATING SLEEVING

**SES-STERLING**<sup>®</sup>  
www.ses-sterling.com

## For the protection and insulation of electrical cables

SES-STERLING offers you insulating sleeving for every application.

The insulating sleeving are available in **4 materials**:



### PVC

PVC is very versatile and has the advantage that it can be used for a variety of applications.



### TPE




TPE is similar to rubber and is used for applications requiring good resistance to high and low temperatures.



### Polychloroprene


Polychloroprene offers high elastic and mechanical performance as well as good resistance to ageing. It can be used with or without lubricant.

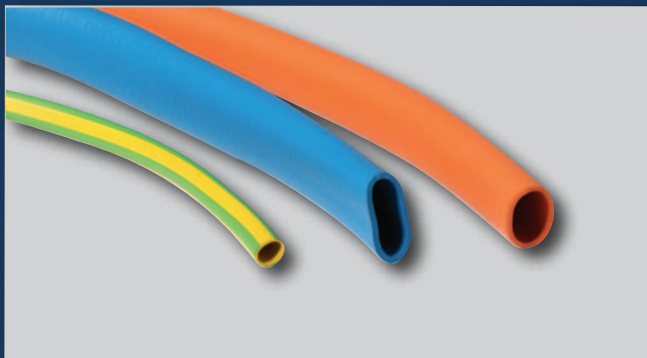

### Silicone



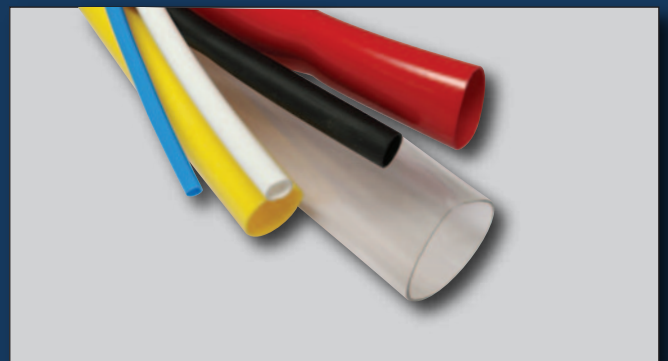

Silicone has an increased dielectric resistivity and also has very good temperature resistance.



HELAVIA sleeves can be ordered with specific properties and in other colours. Prices and delivery times per quantity are available on request.

# INSULATION SLEEVING

## Technical properties

Material	Extra soft		Semi-rigid						
	Polychloroprene rubber	Silicon rubber	PVC					TPE	Silicone
	HELAVIA®	SILAVIA 	PLIO-SUPER	PLIO BT	PLIO HT 	PLIO® sleeving	PLIO®- industrial	PLIOPRENE TPE 	SILA-SUPER 
Operating temperatures	-30 to +90°C (+110°C short term)	-80 to +200°C (+250°C short term)	-20 to +90°C	-55 to 70°C	-40 to 105°C	-20 to +60°C	-20 to +90°C	-40 to +125°C (+150°C short term)	-50 to +200°C
Hardness Shore A	40±5	40±5	90±5	75±5	80±5	85±5	85±5	75±5	70±5
Ultimate elongation	> 500 %	> 600 %	> 300 %	> 400 %	> 250 %	> 300 %	> 250 %	> 400 %	> 350 %
Tensile strength	> 6,5 MPa	> 7 MPa	20 MPa	> 15 MPa	> 15 MPa	20 MPa	15 MPa	8 Mpa	10 Mpa
Dielectric strength	> 13 kV/mm	> 18 kV/mm	20 kV/mm	20kV/mm	20kV/mm	20 kV/mm	20 kV/mm	35 kV/mm	> 25 kV/mm
Flame resistance	V0 UL94	-	V2 UL94	-	V0 UL94	-	V0 UL94	HB UL94	-
Spécification	- General use - Wide range of colours	- Resistant to very high temperature	- General use - Wide range of colours	- Flexible at low temperature	- Resistant to high temperature	- Thick wall - Allows for low pressure fluids to be conducted. pressure.	- Self extinguishable - Available in industrial industrial packaging.	- Very high elasticity - Resistance to higher temperatures.	- Resistant to very high temperature

### Properties

Electrical insulation	●●	●●	●●	●●	●●	●●	●●	●●●	●●●
Temperature performance	●●	●●●	●	○	●●	○	●	●●	●●●
Ozone, UV and weather resistance	●	●●●	●	●	●	●	●	●●	●●●
Range of sizes and colours	●●●	●●	●●●	○	○	○	●●	●	●
Flexibility	●●●	●●●	●	●●	●●	○	●	●●	●●●
Elasticity	●●●	●●	●	●●	○	○	●	●●●	●●
Tensile strength	●	●	●●	●●	●●	●●	●●	●	●

○ : Limited ● : Standard ●● : Good ●●● : Excellent



# HELAVIA®

## Sales programme

### HELAVIA®



<b>Material:</b>	Polychloroprene rubber
<b>Operating temperatures:</b>	-30 to +90°C (+110°C short-term)

Colours:

<b>010</b>	black
<b>001</b>	white
<b>002</b>	blue
<b>003</b>	green
<b>004</b>	yellow
<b>005</b>	orange
<b>006</b>	brown
<b>007</b>	red
<b>008</b>	violet
<b>013</b>	grey
<b>015</b>	pink
<b>020</b>	light blue
<b>060</b>	

Example for order:

code group	detail article	code colour
02100	XXXXXX	XXX



type	article number			dimensions (mm)			m
	black <b>010</b>	colours xxx	yellow/green <b>060</b>	for cables Ø	int. Ø	wall thickness	
HELAVIA A0	0210 0001 010	0210 0051 ***	0213 0101 060	1,25 - 2	1,2	0,5	100
HELAVIA A1	0210 0002 010	0210 0052 ***	0213 0102 060	1,75 - 3,5	1,75	0,5	100
HELAVIA A1bis	0210 0003 010	0210 0053 ***	0213 0103 060	2,4 - 4,5	2,4	0,6	100
HELAVIA A1K*	0210 0007 010	0210 0057 ***	-	2,5 - 5,5	2,5	0,9	100
HELAVIA A2	0210 0004 010	0210 0054 ***	0213 0104 060	3 - 6	3	0,6	100
HELAVIA A2K*	0210 0008 010	0210 0058 ***	-	4 - 8	4	1,2	100
HELAVIA A3	0210 0005 010	0210 0055 ***	0213 0105 060	5 - 9	5	0,7	100
HELAVIA A4	0210 0006 010	0210 0056 ***	0213 0106 060	7,5 - 12	7,5	0,8	100
HELAVIA A5	0210 0009 010	0210 0059 ***	0213 0107 060	10 - 15	10	0,9	50
HELAVIA A8	0210 0010 010	0210 0060 ***	0213 0108 060	12 - 20	12	1,2	50
HELAVIA A9	0210 0011 010	0210 0061 ***	0213 0109 060	14 - 23	14	1,3	50
HELAVIA A10	0210 0012 010	0210 0062 ***	0213 0110 060	17 - 28	17	1,3	40

\* thick-walled sleeves.  
Lubricated sleeves up to type A4.

### • HELAVIA® sleeving British Standard BS3858 type 1C

Standard colours:

<b>010</b>	black
<b>001</b>	white
<b>002</b>	blue
<b>003</b>	green
<b>004</b>	yellow
<b>005</b>	orange
<b>006</b>	brown
<b>007</b>	red
<b>008</b>	violet
<b>013</b>	grey
<b>015</b>	pink
<b>020</b>	light blue

type	article number		dimensions (mm)			m
	black <b>010</b>	colours xxx	for cable Ø	int. Ø	wall thickness	
HELAVIA A0a	0206 0601 010	0206 0651 ***	1,2 - 2,5	1,2	0,75	100
HELAVIA A0bis	0206 0602 010	0206 0652 ***	1,5 - 3	1,5	0,75	100
HELAVIA A1a	0206 0603 010	0206 0653 ***	2 - 4	2	0,75	100
HELAVIA A2a	0206 0604 010	0206 0654 ***	3 - 6	3	0,75	100
HELAVIA A3a	0206 0605 010	0206 0655 ***	5 - 10	5	1	100

# SILAVIA

## Sales programme

### SILAVIA for very high temperatures



<b>Material:</b>	Silicone rubber
<b>Operating temperatures:</b>	-80 to +200°C (+250°C short-term)


Standard colours:

018	natural			
011	transparent			
001	002	003	004	006
white	blue	green	yellow	brown
007	010	013		
red	black	grey		

Example for order:

code group	detail article	code colour
02110	xxxxxx	xxx



type	article number			dimensions (mm)			 m
	natural 018	transparent 011	colours xxx	for cable Ø	int. Ø	wall thickness	
SILAVIA A0	0211 0001 018	0211 0021 011	0211 0051 ***	1,3 - 1,8	1,25	0,5	100
SILAVIA A1	0211 0002 018	0211 0022 011	0211 0052 ***	1,9 - 2,5	1,75	0,5	100
SILAVIA A1bis	0211 0003 018	0211 0023 011	0211 0053 ***	2,4 - 3	2,4	0,6	100
SILAVIA A1K*	0211 0013 018	0211 0031 011	0211 0061 ***	2,5 - 4	2,5	0,9	100
SILAVIA A2	0211 0004 018	0211 0024 011	0211 0054 ***	3 - 4	3	0,6	100
SILAVIA A2K*	0211 0014 018	0211 0032 011	0211 0062 ***	4 - 6	4	1,2	100
SILAVIA A3	0211 0005 018	0211 0025 011	0211 0055 ***	5 - 7	5	0,7	100
SILAVIA A4	0211 0006 018	0211 0026 011	0211 0056 ***	7,5 - 9	7,5	0,8	70
SILAVIA A5	0211 0009 018	0211 0027 011	0211 0057 ***	10 - 13	10	1	40
SILAVIA A8	0211 0010 018	0211 0028 011	0211 0058 ***	13 - 16	12	1,2	35
SILAVIA A9	0211 0011 018	0211 0029 011	0211 0059 ***	15 - 19	14	1,3	30
SILAVIA A10	0211 0012 018	0211 0030 011	0211 0060 ***	18 - 25	17	1,3	30

\* thick-walled sleeving  
Lubricated sleeving up to type A4



# PLIO-SUPER

## Sales programme



### PLIO-SUPER


<b>Material:</b>	PVC
<b>Operating temperatures:</b>	-20 to +90°C

Standard colour:

<b>010</b> black						
<b>001</b> white	<b>002</b> blue	<b>004</b> yellow	<b>007</b> red	<b>041</b> transparent	<b>060</b> yellow/green	

Example for order

code group	detail article	code colour
0801	XXXXXX	XX

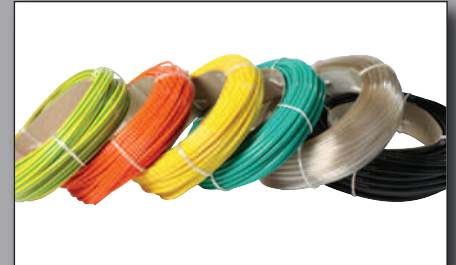

Semi-standard colours (available upon request)

<b>003</b> green	<b>005</b> orange	<b>006</b> brown	<b>008</b> purple	<b>013</b> grey
------------------	-------------------	------------------	-------------------	-----------------

type	article number		type	article number yellow/green	int. Ø mm	ext. Ø mm	wall thickness mm	m
	black 010	colours XXX						
PLIO-SUPER 0,5x1,3	0801 0034 010	0801 0034 ***	-	-	0,5	1,3	0,4	50
PLIO-SUPER 1,0x1,8	0801 0001 010	0801 0001 ***	-	-	1	1,8	0,4	50
PLIO-SUPER 1,5x2,3	0801 0002 010	0801 0002 ***	-	-	1,5	2,3	0,4	50
PLIO-SUPER 2,0x2,8	0801 0003 010	0801 0003 ***	PLIO-SUPER J/V 2x2,8	0837 0001 060	2	2,8	0,4	50
PLIO-SUPER 2,5x3,3	0801 0004 010	0801 0004 ***	-	-	2,5	3,3	0,4	50
PLIO-SUPER 3,0x3,8	0801 0005 010	0801 0005 ***	-	-	3	3,8	0,4	50
PLIO-SUPER 3,5x4,3	0801 0006 010	0801 0006 ***	-	-	3,5	4,3	0,4	50
PLIO-SUPER 4,0x5,0	0801 0007 010	0801 0007 ***	PLIO-SUPER J/V 4x5,0	0837 0002 060	4	5	0,5	50
PLIO-SUPER 4,5x5,5	0801 0008 010	0801 0008 ***	-	-	4,5	5,5	0,5	25
PLIO-SUPER 5,0x6,0	0801 0009 010	0801 0009 ***	-	-	5	6	0,52	25
PLIO-SUPER 6,0x7,1	0801 0010 010	0801 0010 ***	PLIO-SUPER J/V 6x7,1	0837 0003 060	6	7,1	0,55	25
PLIO-SUPER 7,0x8,2	0801 0011 010	0801 0011 ***	-	-	7	8,2	0,60	25
PLIO-SUPER 8,0x9,2	0801 0012 010	0801 0012 ***	PLIO-SUPER J/V 8x9,2	0837 0004 060	8	9,2	0,62	25
PLIO-SUPER 9,0x10,3	0801 0013 010	0801 0013 ***	-	-	9	10,3	0,67	25
PLIO-SUPER 10,0x11,4	0801 0014 010	0801 0014 ***	PLIO-SUPER J/V 10x11,4	0837 0005 060	10	11,4	0,7	25
PLIO-SUPER 12,0x13,5	0801 0016 010	0801 0016 ***	PLIO-SUPER J/V 12x13,5	0837 0006 060	12	13,5	0,75	25
PLIO-SUPER 14,0x15,6	0801 0018 010	0801 0318 ***	PLIO-SUPER J/V 14x15,6	0837 0007 060	14	15,6	0,8	25
PLIO-SUPER 16,0x17,6	0801 0020 010	0801 0320 ***	PLIO-SUPER J/V 16x17,6	0837 0008 060	16	17,6	0,8	25
PLIO-SUPER 18,0x19,6	0801 0022 010	0801 0322 ***	-	-	18	19,6	0,8	25
PLIO-SUPER 20,0x21,6	0801 0024 010	0801 0324 ***	PLIO-SUPER J/V 20x21,6	0837 0010 060	20	21,6	0,8	25
PLIO-SUPER 22,0x24,0	0801 0025 010	0801 0325 ***	-	-	22	24	1	25
PLIO-SUPER 24,0x26,0	0801 0026 010	0801 0326 ***	-	-	24	26	1	25
PLIO-SUPER 26,0x28,0	0801 0027 010	0801 0327 ***	-	-	26	28	1	25
PLIO-SUPER 28,0x30,0	0801 0028 010	0801 0328 ***	-	-	28	30	1	25
PLIO-SUPER 30,0x32,0	0801 0029 010	0801 0329 ***	-	-	30	32	1	25
PLIO-SUPER 32,0x34,0	0801 0030 010	0801 0330 ***	-	-	32	34	1	25
PLIO-SUPER 34,0x36,0	0801 0031 010	0801 0331 ***	-	-	34	36	1	25
PLIO-SUPER 36,0x38,0	0801 0032 010	0801 0332 ***	-	-	36	38	1	25
PLIO-SUPER 40,0x42,0	0801 0033 010	0801 0333 ***	-	-	40	42	1	25
PLIO-SUPER 50,0x53,0	0801 0035 010	-	-	-	50	53	1,50	25
PLIO-SUPER 60,0x63,0	0801 0036 010	-	-	-	60	63	1,50	25

# PLIO HT LF - PLIO BT LF - TUBE PLIO®

## Sales programme


### PLIO HT LF for high temperatures



<b>Material:</b>	PVC
<b>Operating temperatures:</b>	-40 to +105°C

Colour:

**010** black

type	article number	int. Ø mm	ext. Ø mm	wall thickness mm	 m
PLIO H.T. 1,0x1,8	0817 0001 010	1	1,8	0,4	50
PLIO H.T. 1,5x2,5	0817 0002 010	1,5	2,5	0,5	50
PLIO H.T. 2,0x2,8	0817 0003 010	2	2,8	0,4	50
PLIO H.T. 3,0x3,9	0817 0004 010	3	3,9	0,45	50
PLIO H.T. 4,0x5,0	0817 0005 010	4	5	0,5	50
PLIO H.T. 5,0x6,0	0817 0006 010	5	6	0,52	25
PLIO H.T. 6,0x7,1	0817 0007 010	6	7,1	0,55	25
PLIO H.T. 8,0x9,2	0817 0008 010	8	9,2	0,62	25
PLIO H.T. 10,0x11,4	0817 0009 010	10	11,4	0,7	25
PLIO H.T. 12,0x13,5	0817 0010 010	12	13,5	0,75	25
PLIO H.T. 14,0x15,6	0817 0011 010	14	15,6	0,8	25
PLIO H.T. 16,0x17,6	0817 0012 010	16	17,6	0,8	25
PLIO H.T. 20,0x21,6	0817 0014 010	20	21,6	0,8	25




### PLIO BT LF for low temperatures



<b>Material:</b>	PVC
<b>Operating temperatures:</b>	-55 to +70°C

Colour:

**041** transparent/clear

type	article number	int. Ø mm	ext. Ø mm	wall thickness mm	 m
PLIO B.T. 1,0x1,8	0818 0001 011	1	1,8	0,4	50
PLIO B.T. 1,5x2,5	0818 0002 011	1	2,5	0,5	50
PLIO B.T. 2,0x2,8	0818 0003 011	2	2,8	0,4	50
PLIO B.T. 3,0x3,9	0818 0004 011	3	3,9	0,45	50
PLIO B.T. 4,0x5,0	0818 0005 011	4	5	0,5	50
PLIO B.T. 5,0x6,0	0818 0006 011	5	6	0,52	25
PLIO B.T. 6,0x7,1	0818 0007 011	6	7,1	0,55	25
PLIO B.T. 8,0x9,2	0818 0008 011	8	9,2	0,62	25
PLIO B.T. 10,0x11,4	0818 0009 011	10	11,4	0,7	25
PLIO B.T. 6,0x17,6	0818 0012 011	16	17,6	0,8	25




### PLIO® thick-walled sleeving



<b>Material:</b>	PVC
<b>Operating temperatures:</b>	-20 to +60°C

Colour:

**041** transparent/clear

type	article number	int. Ø mm	ext. Ø mm	wall thickness mm	 m
Sleeve PLIO Indus. 2,5x5,5	0803 0001 011	2,5	5,5	1,5	50
Sleeve PLIO Indus. 3,5x6,0	0803 0003 011	3,5	6	1,2	50
Sleeve PLIO Indus. 4,0x7,0	0803 0005 011	4	7	1,5	25
Sleeve PLIO Indus. 4,5x7,5	0803 0006 011	4,5	7,5	1,5	25
Sleeve PLIO Indus. 5,0x8,0	0803 0007 011	5	8	1,5	25
Sleeve PLIO Indus. 6,0x9,0	0803 0008 011	6	9	1,5	25
Sleeve PLIO Indus. 8,0x11,0	0803 0010 011	8	11	1,5	25
Sleeve PLIO Indus. 10,0x13,5	0803 0012 011	10	13,5	1,7	25
Sleeve PLIO Indus. 15,0x19,0	0803 0023 011	15	19	2	25



### PLIO-industriel in industrial packs



<b>Material:</b>	PVC
<b>Operating temperatures:</b>	-20 to +90°C

Standard colours:

**010**  
black


Semi-standard colours:  
(minimum 5 rolls per type and colour)

**001** **002** **004** **007**  
white blue yellow red

Example for order:

code group	detail article	code colour
0801	XXXXXX	XXX



type	article number	int. Ø mm	ext. Ø mm	wall thickness mm	 m
PLIO-indus 2,0	0801 0402 ***	2	2,8	0,4	800
PLIO-indus 3,0	0801 0403 ***	3	3,8	0,4	500
PLIO-indus 4,0	0801 0404 ***	4	5	0,5	500
PLIO-indus 5,0	0801 0405 ***	5	6	0,5	500
PLIO-indus 6,0	0801 0406 ***	6	7	0,5	500
PLIO-indus 7,0	0801 0407 ***	7	8,7	0,5	500
PLIO-indus 8,0	0801 0408 ***	8	9,4	0,7	400
PLIO-indus 9,0	0801 0409 ***	9	10,4	0,7	400
PLIO-indus 10,0	0801 0410 ***	10	11,4	0,7	300
PLIO-indus 12,0	0801 0412 ***	12	13,4	0,7	200
PLIO-indus 14,0	0801 0414 ***	14	15,4	0,7	200
PLIO-indus 16,0	0801 0416 ***	16	17,6	0,8	150
PLIO-indus 18,0	0801 0418 ***	18	19,6	0,8	150
PLIO-indus 20,0	0801 0420 ***	20	21,6	0,8	75
PLIO-indus 22,0	0801 0422 ***	22	24	1	75
PLIO-indus 24,0	0801 0424 ***	24	26	1	50
PLIO-indus 26,0	0801 0426 ***	26	28,4	1,2	50



Roll (standard packing)



Cardboard (upon request)

The sleeving is inflated and sealed at both ends so that they retain their profile. Upon request sleeving can be delivered on cardboard reels (see below). Other types or colours: Prices and delivery time upon request.


### PLIO-industriel in small length



<b>Material:</b>	PVC
<b>Operating temperatures:</b>	-20 to +90°C

Colour:

**010**  
black

type	article number	int. Ø mm	ext. Ø mm	wall thickness mm	 m
PLIO-indus 2,0 RLX 50	0801 0652 010	2	2,8	0,4	50
PLIO-indus 3,0 RLX 50	0801 0653 010	3	3,8	0,4	50
PLIO-indus 4,0 RLX 50	0801 0654 010	4	5	0,5	50
PLIO-indus 5,0 RLX 25	0801 0655 010	5	6	0,5	25
PLIO-indus 6,0 RLX 25	0801 0656 010	6	7	0,5	25
PLIO-indus 7,0 RLX 25	0801 0657 010	7	8,7	0,5	25
PLIO-indus 8,0 RLX 25	0801 0658 010	8	9,4	0,7	25
PLIO-indus 9,0 RLX 25	0801 0659 010	9	10,4	0,7	25
PLIO-indus 10,0 RLX 25	0801 0660 010	10	11,4	0,7	25
PLIO-indus 12,0 RLX 25	0801 0662 010	12	13,4	0,7	25
PLIO-indus 14,0 RLX 25	0801 0664 010	14	15,4	0,7	25



# PLIOPRENE TPE / SILA-SUPER

## Sales programme

### PLIOPRENE TPE




<b>Material:</b>	TPE
<b>Operating temperatures:</b>	-40 to +125°C

Colour:

010

black



type	article number	int. Ø mm	ext. Ø mm	wall thickness mm	 m
PLIOPRENE TPE 2	0207 0002 010	2	2,8	0,4	50
PLIOPRENE TPE 3	0207 0003 010	3	3,8	0,4	50
PLIOPRENE TPE 4	0207 0004 010	4	5	0,5	50
PLIOPRENE TPE 5	0207 0005 010	5	6,1	0,5	50
PLIOPRENE TPE 6	0207 0006 010	6	7,2	0,6	25
PLIOPRENE TPE 8	0207 0008 010	8	9,3	0,65	25
PLIOPRENE TPE 10	0207 0010 010	10	11,4	0,7	25
PLIOPRENE TPE 12	0207 0012 010	12	13,6	0,8	25
PLIOPRENE TPE 14	0207 0014 010	14	15,6	0,8	25

### SILA-SUPER




<b>Material:</b>	Silicone
<b>Operating temperatures:</b>	-50 to +200°C

Colour:

011

transparent / clear



type	article number	int. Ø mm	ext. Ø mm	wall thickness mm	 m
SILA-SUPER 4	0214 0004 011	4	4,8	0,4	50
SILA-SUPER 6	0214 0006 011	6	7	0,5	25
SILA-SUPER 8	0214 0008 011	8	9,2	0,6	25
SILA-SUPER 10	0214 0010 011	10	11,4	0,7	25
SILA-SUPER 12	0214 0012 011	12	13,6	0,8	25



# SLEEVING METHODS

The SES HELAVIA® and SILAVIA rubber sleeves allow both the assembly and insulation of electrical cable ends. They also offer the possibility of simultaneous marking, either with a coloured sleeve or with a printed SES sleeve.

SES rubber sleeves protect cable ends from dirt, corrosion and friction and can be used as protectors and give the cabling an aesthetic appearance.



## HELAVIA® sleeves

HELAVIA® sleeves are made of polychloroprene rubber with an operating temperature of -30 to +90°C (+110°C peak).

Available in black, yellow/green and colours. Sizes A0 to A4 are lubricated.

The British Standard sleeves conform to BS 3858 type 1C.

## SILAVIA sleeves

(for high temperatures)

Made of silicone rubber with an operating temperature of -80 to +200°C (+250°C peak).

The sleeves are available in various colours. Sizes A0 to A4 are lubricated.



HELAVIA® sleeves can be ordered with specific properties and in other colours. Prices and delivery times per quantity are available on request.

## Lubricant for sleeves

LUB2 is recommended by SES-STERLING as a lubricant to facilitate the assembly of HELAVIA® and SILAVIA rubber sleeves.

The brush attached to the screw cap delivers the right amount of lubricant to ensure proper assembly with our sleeving tools.



## Tools and equipment

In order to enable the efficient and technical implementation of our sleeving process, SES-STERLING offers a range of special tools and equipment.

The pictures below give you an overview of this programme.

For further details, please refer to the chapter "TOOLS" in the general catalogue, group D1.



# PRINTED MARKER SLEEVES

## HELAVIA® marker sleeves

HELAVIA® marker sleeves are made of polychloroprene rubber and are aesthetically pleasing and space-saving thanks to their thin wall which makes them integral with the cable.

### • HELAVIA® LASER marker sleeves



The LASER-engraved sleeves guarantee high quality, indelible and tamper-proof marking.

### • HELAVIA-TWIN marker sleeves



The TWIN sleeves are letterpress printed on demand and coated with a protective varnish to ensure that the marking remains intact.

## SILAVIA marker sleeves

SILAVIA marker sleeves are made of silicone rubber and are characterised by good elasticity, resistance to a wide temperature range and excellent resistance to ozone.

### • SILAVIA LASER marker sleeves




### • SILAVIA-TWIN marker sleeves



## PLIO® marker sleeves

PLIO® PVC marker sleeves allow a quick and easy identification. They are simply slid onto the conductor and can be fixed with our special glue "PLIO-Colle".

The printing process used guarantees good marking stability.

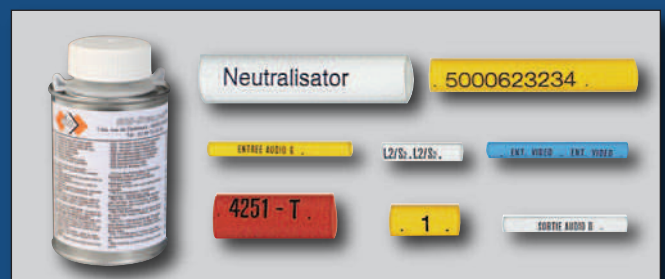



**SES-STERLING** <sup>®</sup>  
[www.ses-sterling.com](http://www.ses-sterling.com)

**All around the cable**

## WORKING WITH SES-STERLING

We at SES-STERLING take pride in the fact that since our family enterprise was created in 1928, we have managed to grow it into an internationally renowned cable accessories manufacturer that can guarantee fast worldwide delivery to its clients. We're considered as a forerunner in the transformation of raw materials into electrical wiring accessories mainly thanks to the fact that we manage and control the whole production process from A to Z. We can therefore guarantee you top quality and innovative products that are 100% "Made in France".

A strong research culture makes sure the cable protection, marking and fixing products manufactured by SES-STERLING are manufactured to fulfil the needs of all our customers. With more than 26000 product references our catalogue will be able to provide trusted products of any type our clients are seeking offering the best balance between price and quality, without having to compromise on creativity. What you really need is a continuous availability, fast delivery, sufficient stocks and efficient distribution. Thanks to these elements we are able to offer first-class responsiveness, troubleshooting and support for our partners.

Our specialised team of research and development engineers work all year round to be sure that the most effective raw material mixes are used in our products so that the end user will sleep soundly whenever completing a project. All products are constantly adapted for ease of use in the field.

The SES STERLING commercial and technical teams aim to be as close as possible to our all important clients with offices in Switzerland, Belgium, Germany and the United Kingdom. And thanks to our extensive partner network in 50 countries around the world we can offer our quality products to you in the time scale required. Our teams are always ready to listen to your feedback, suggestions and questions. Local contact is the key factor, not only can we respond to your needs, but we aim to fulfil them whenever they arise.

