

**TOP
DESIGN**

THE ESSENCE OF
LIGHT, NATURE & LIFE

DOTS

Eagle

5 Model
3 Power
P. 122

Owl

3 Model
3 Power
P. 134

Hawk

6 Model
20 Power
P. 142



Eagle



EAGLE R2L
6W - P127



EAGLE R5L
10W - P129



EAGLE R10L
20W - P129



EAGLE S5L
10W - P131



EAGLE RT5L
10W - P133

La visión del aguila es potente y capaz de enfocar cualquier punto a una gran distancia. Eagle toma esta maravilla de la naturaleza para desarrollar luminarias capaces de poner a foco cualquier elemento en tus interiores.

The eagle's vision is powerful and capable of focusing any point at a great distance. Eagle takes this wonder of nature to develop luminaires capable of bringing any element into focus in your interiors.

EAGLE
DOTS 






7ID501 06 - 2 1 N 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID501	6W	<ul style="list-style-type: none"> 2- ON/OFF 100-277V PF>0,9 4- DALI/PUSH/1-10V 220-240V PF>0,95 5- Trailing Edge 220-240V PF>0,9 SMART CONTROL (See page. 324) 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. (Option Driver 2 - 5) 2- 5 Years Warranty Other driver Incl. (Option Driver 4) 	<ul style="list-style-type: none"> A - 15° J - 30° N - 45° 	<ul style="list-style-type: none"> 3 - 3000K 420 lm system 678 lm source (45°) 4 - 4000K 441 lm system 720 lm source (45°) 	<ul style="list-style-type: none"> 0101- Black 0109- Black-Tec. Gold 9001- Tec. White-Black 9009- Tec. White-Tec. Gold 9090- Tec. White

EAGLE R2L



Accessories not included

Emergency kit (page 322)

2DCLEDK1

2DCLEDK2





The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com



7ID501 10 - 2 1 N 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID501	10W	<p>2- ON/OFF 100-277V PF>0,9</p> <p>4- DALI/PUSH/1-10V 220-240V PF>0,95</p> <p>5- Trailing Edge 220-240V PF>0,9</p> <p>SMART CONTROL <i>(See page. 324)</i></p>	<p>1- 5 Years Warranty JISO driver Incl. <i>(Option Driver 2 - 5)</i></p> <p>2- 5 Years Warranty Other driver Incl. <i>(Option Driver 4)</i></p>	<p>A - 15°</p> <p>J - 30°</p> <p>N - 45°</p>	<p>3 - 3000K 800 lm system 1130 lm source <i>(45°)</i></p> <p>4 - 4000K 840 lm system 1200 lm source <i>(45°)</i></p>	<p>0101- Black</p> <p>0109- Black- Tec. Gold</p> <p>9001- Tec. White-Black</p> <p>9009- Tec. White-Tec. Gold</p> <p>9090- Tec. White</p>

EAGLE R5L




146x45 #140x37



7ID501 20 - 2 1 N 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID501	20W	<p>2- ON/OFF 220-240V PF>0,9</p> <p>4- DALI/PUSH/1-10V 220-240V PF>0,95</p> <p>5- Trailing Edge 220-240V PF>0,9</p> <p>SMART CONTROL <i>(See page. 324)</i></p>	<p>1- 5 Years Warranty JISO driver Incl. <i>(Option Driver 2 - 5)</i></p> <p>2- 5 Years Warranty Other driver Incl. <i>(Option Driver 4)</i></p>	<p>A - 15°</p> <p>J - 30°</p> <p>N - 45°</p>	<p>3 - 3000K 1600 lm system 2260 lm source <i>(45°)</i></p> <p>4 - 4000K 1680 lm system 2400 lm source <i>(45°)</i></p>	<p>0101- Black</p> <p>0109- Black- Tec. Gold</p> <p>9001- Tec. White-Black</p> <p>9009- Tec. White-Tec. Gold</p> <p>9090- Tec. White</p>

EAGLE R10L



279x45 #272x37




Accessories not included

Emergency kit *(page 322-323)*

2DCLEDK5

2DCLEDK29




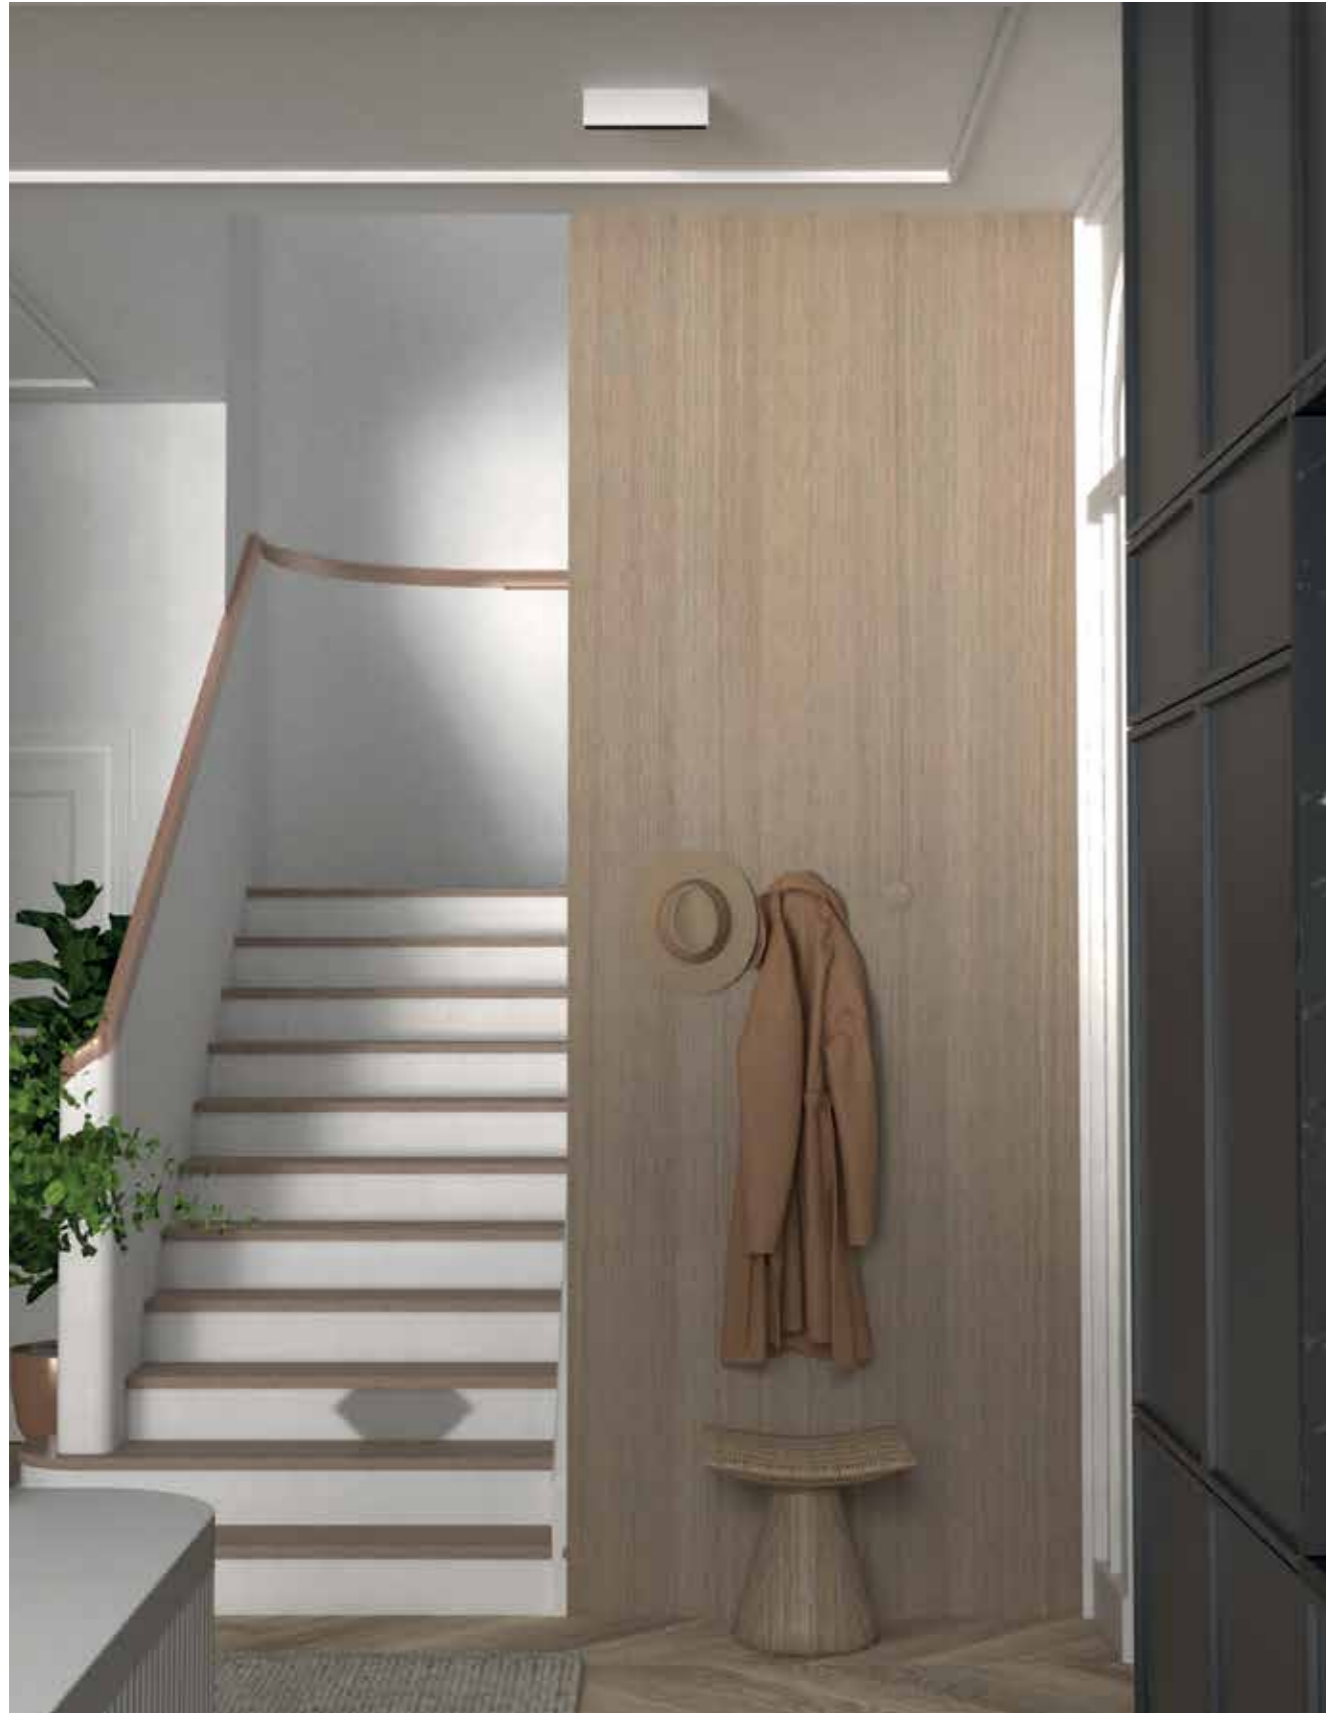

7ID201 10 - 2 1 N 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID201	10W	2- ON/OFF 100-277V PF>0,9	1- 5 Years Warranty JISO driver Incl.	A - 15° J - 30° N - 45°	3 - 3000K 800 lm system 1130 lm source (45°) 4 - 4000K 840 lm system 1200 lm source (45°)	9001- Tec. White-Black 9009- Tec. White-Tec. Gold 9090- Tec. White

EAGLE S5L



Accessories not included

Emergency kit (page 322)

2DCLEDK1

2DCLEDK2







7ID601 10 - 2 1 N 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID601	10W	<p>2- ON/OFF 100-277V PF>0,9</p> <p>4- DALI/PUSH/1-10V 220-240V PF>0,95</p> <p>5- Trailing Edge 220-240V PF>0,9</p> <p>SMART CONTROL (See page. 324)</p>	<p>1- 5 Years Warranty JISO driver Incl. (Option Driver 2 - 5)</p> <p>2- 5 Years Warranty Other driver Incl. (Option Driver 4)</p>	<p>A - 15°</p> <p>J - 30°</p> <p>N - 45°</p>	<p>3 - 3000K 800 lm system 1130 lm source (45°)</p> <p>4 - 4000K 840 lm system 1200 lm source (45°)</p>	<p>9001- Tec. White-Black</p> <p>9009- Tec. White-Tec. Gold</p> <p>9090- Tec. White</p>


EAGLE RT5L

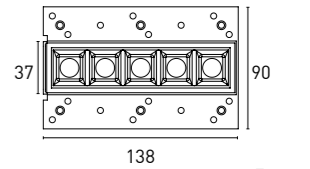


#145x40

Accessories not included

Emergency kit (page 322-323)



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com

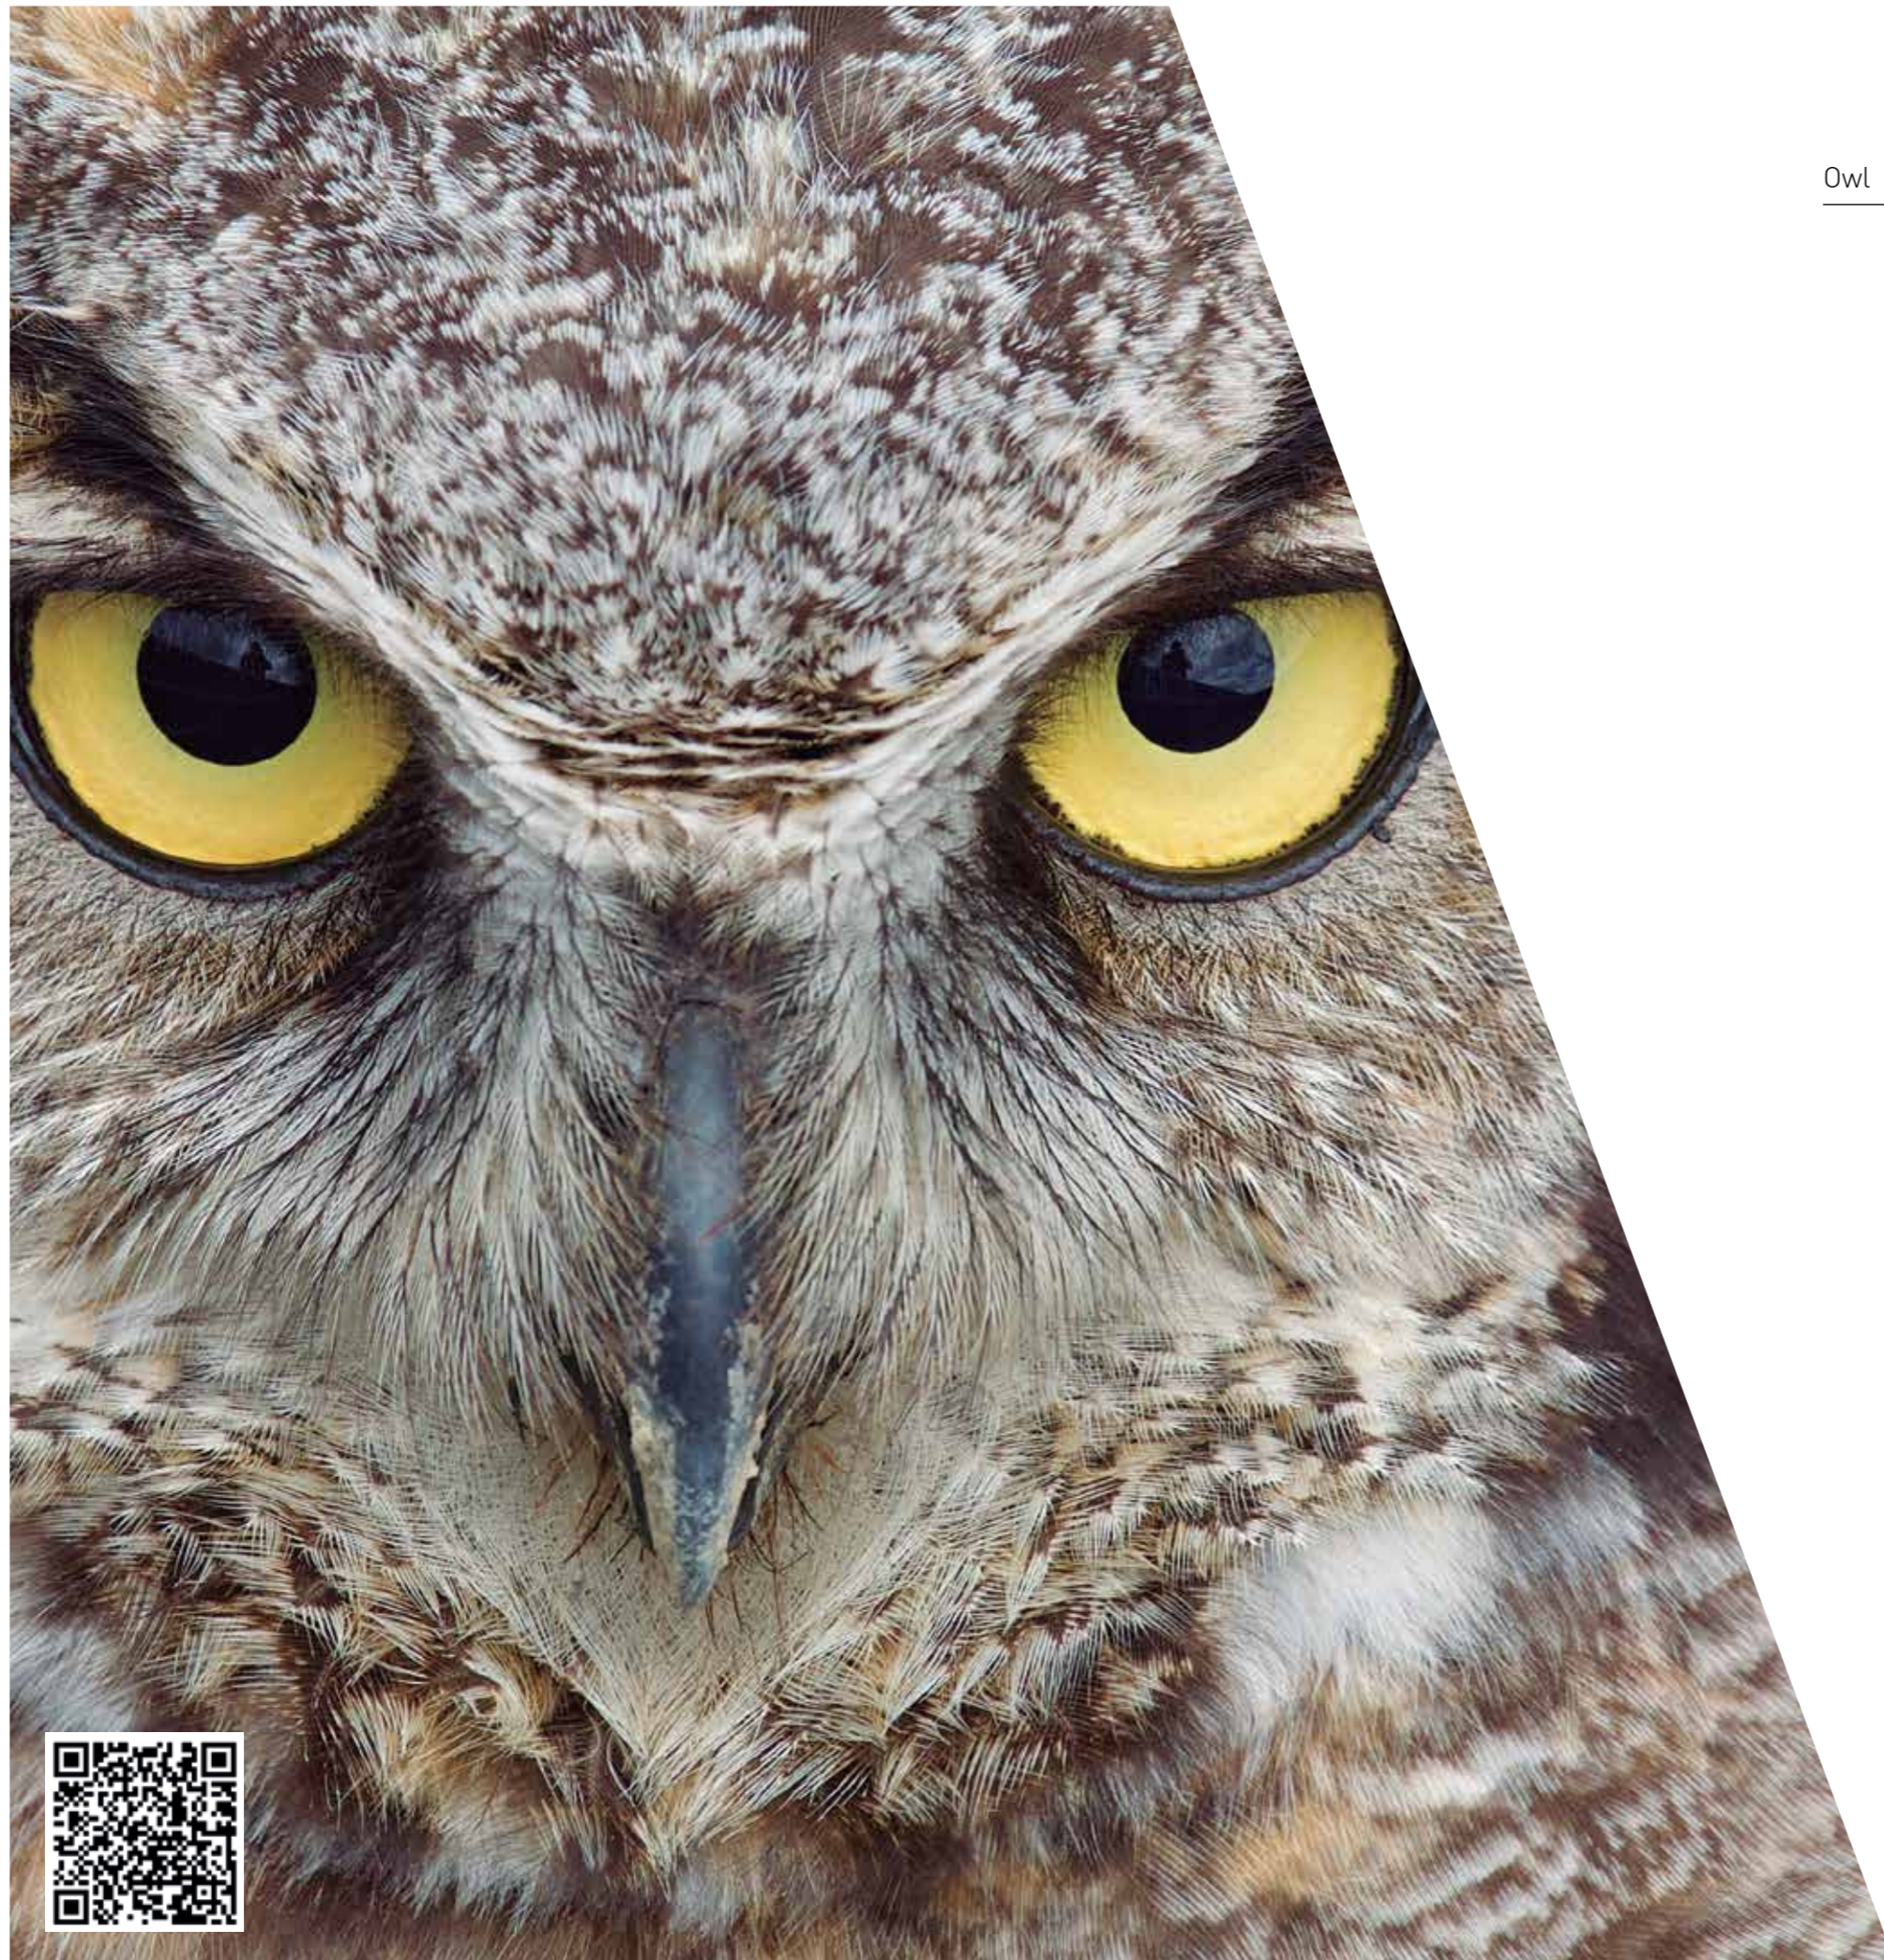

Owl



OWL R2L
10W - P139



OWL R4L
14W - P141





OWL R5L
20W - P141

Puntos que vislumbran en la oscuridad hasta el más mínimo detalle, así son los ojos de un buho. OWL con sus pequeñas y elegantes luminarias trae luz a cualquier sitio en tus estancias.


Points that glimpse in the dark to the smallest detail, such are the eyes of an owl. OWL with its small and elegant luminaires brings light to any room in your rooms.



OWL
DOTS **TOP
DESIGN**

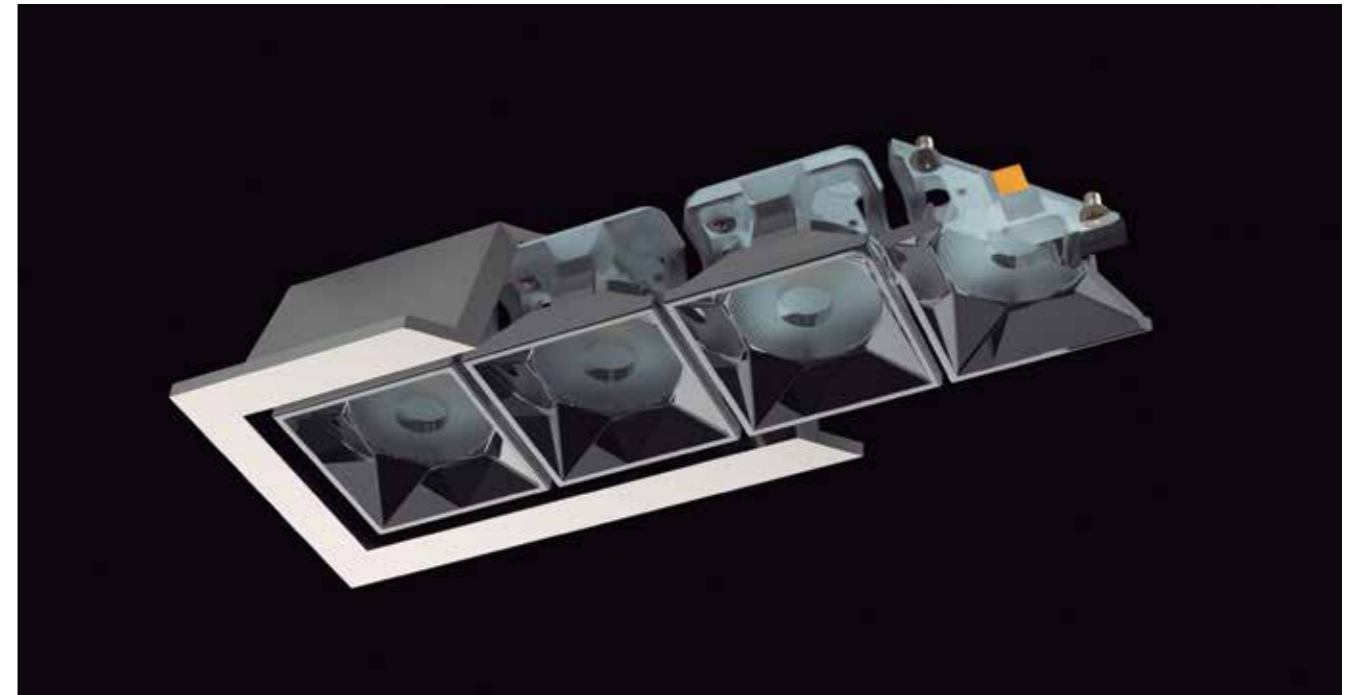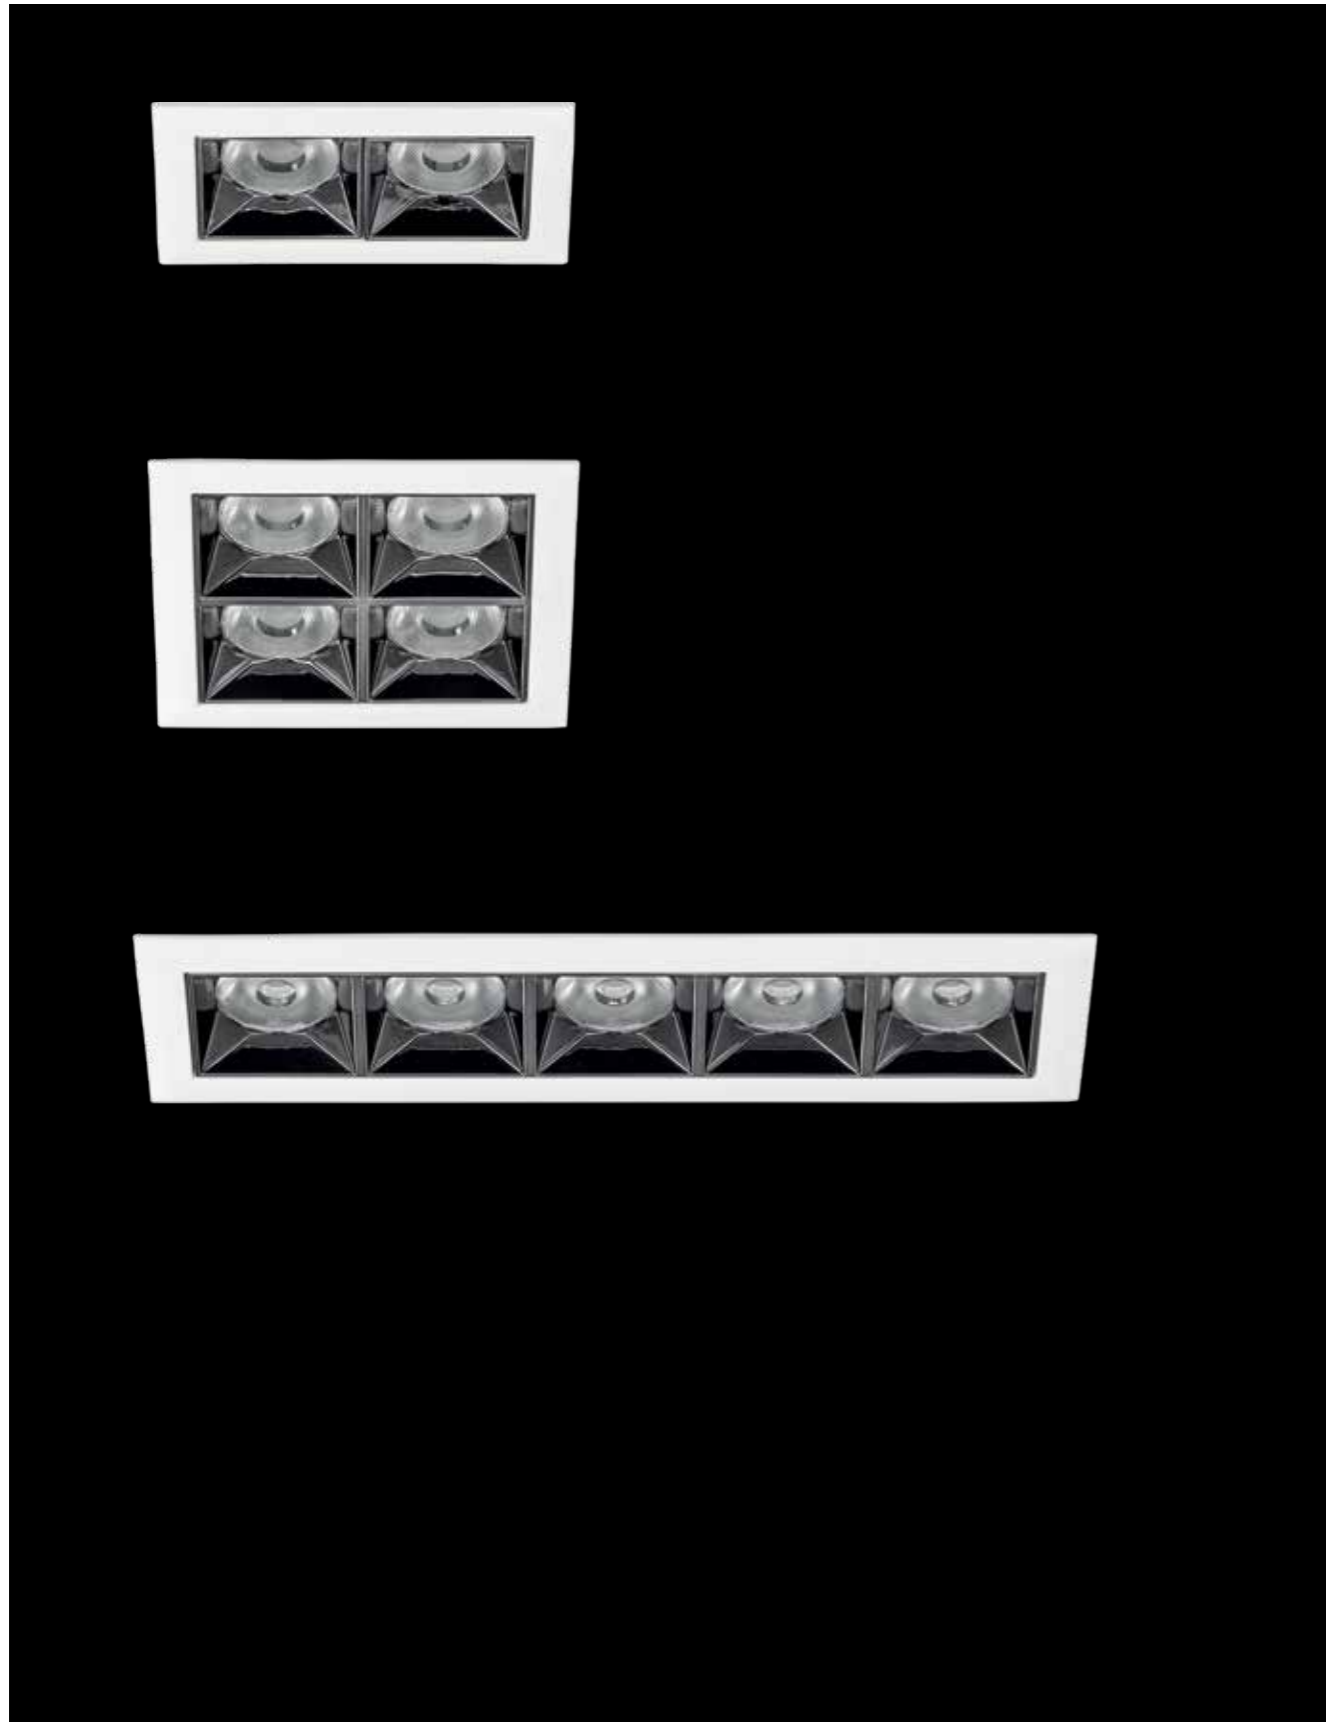

The OWL collection has different sizes and opening degrees, but the same linear design.
Applications: residential, hospitality.

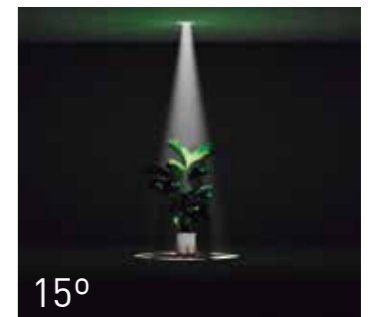

15°



24°




50°



OWL R2L

7ID512 10 - 2 1 W 3 - 9018
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID512	10W	<ul style="list-style-type: none"> 2- ON/OFF 220-240V PF>0,9 3- 1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,95 D- DALI / PUSH 200-240V PF>0,95 SMART CONTROL (See page. 324) 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. (Option Driver 2 - 5) 2- 5 Years Warranty Other driver Incl. (Option Driver 3 - D) 	<ul style="list-style-type: none"> A - 15° I - 24° W - 50° 	<ul style="list-style-type: none"> 3 - 3000K 880 lm system 1280 lm source (50°) 4 - 4000K 924 lm system 1350 lm source (50°) 	<ul style="list-style-type: none"> 9018- Tec. White- Graphite

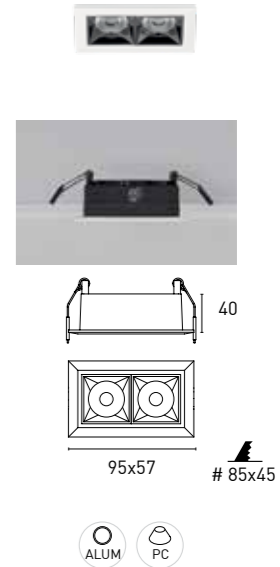

Accessories not included

Emergency kit (page 322-323)




The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com



7ID512 12 - 2 1 W 3 - 9018
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID512	14W	<ul style="list-style-type: none"> 2- ON/OFF 220-240V PF>0,9 3- 1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,9 D- DALI / PUSH 200-240V PF>0,95 SMART CONTROL [See page. 324] 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. [Option Driver 2 - 5] 2- 5 Years Warranty Other driver Incl. [Option Driver 3 - D] 	<ul style="list-style-type: none"> A - 15° I - 24° W - 50° 	<ul style="list-style-type: none"> 3 - 3000K 1080 lm system 1536 lm source [50°] 4 - 4000K 1134 lm system 1620 lm source [50°] 	<ul style="list-style-type: none"> 9018- Tec. White- Graphite


OWL R4L



95x95



OWL R5L



211x59



7ID512 20 - 2 1 W 3 - 9018
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID512	20W	<ul style="list-style-type: none"> 2- ON/OFF 220-240V PF>0,95 4- DALI/PUSH/1-10V 200-240V PF>0,95 5- Trailing Edge 220-240V PF>0,9 SMART CONTROL [See page. 324] 	<ul style="list-style-type: none"> 1- 5 Years Warranty JISO driver Incl. [Option Driver 2 - 5] 2- 5 Years Warranty Other driver Incl. [Option Driver 4] 	<ul style="list-style-type: none"> A - 15° I - 24° W - 50° 	<ul style="list-style-type: none"> 3 - 3000K 1840 lm system 2560 lm source [50°] 4 - 4000K 1932 lm system 2700 lm source [50°] 	<ul style="list-style-type: none"> 9018- Tec. White- Graphite


Accessories not included

Emergency kit [page 322-323]

- 2DCLEDK5
- 2DCLEDK29



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com

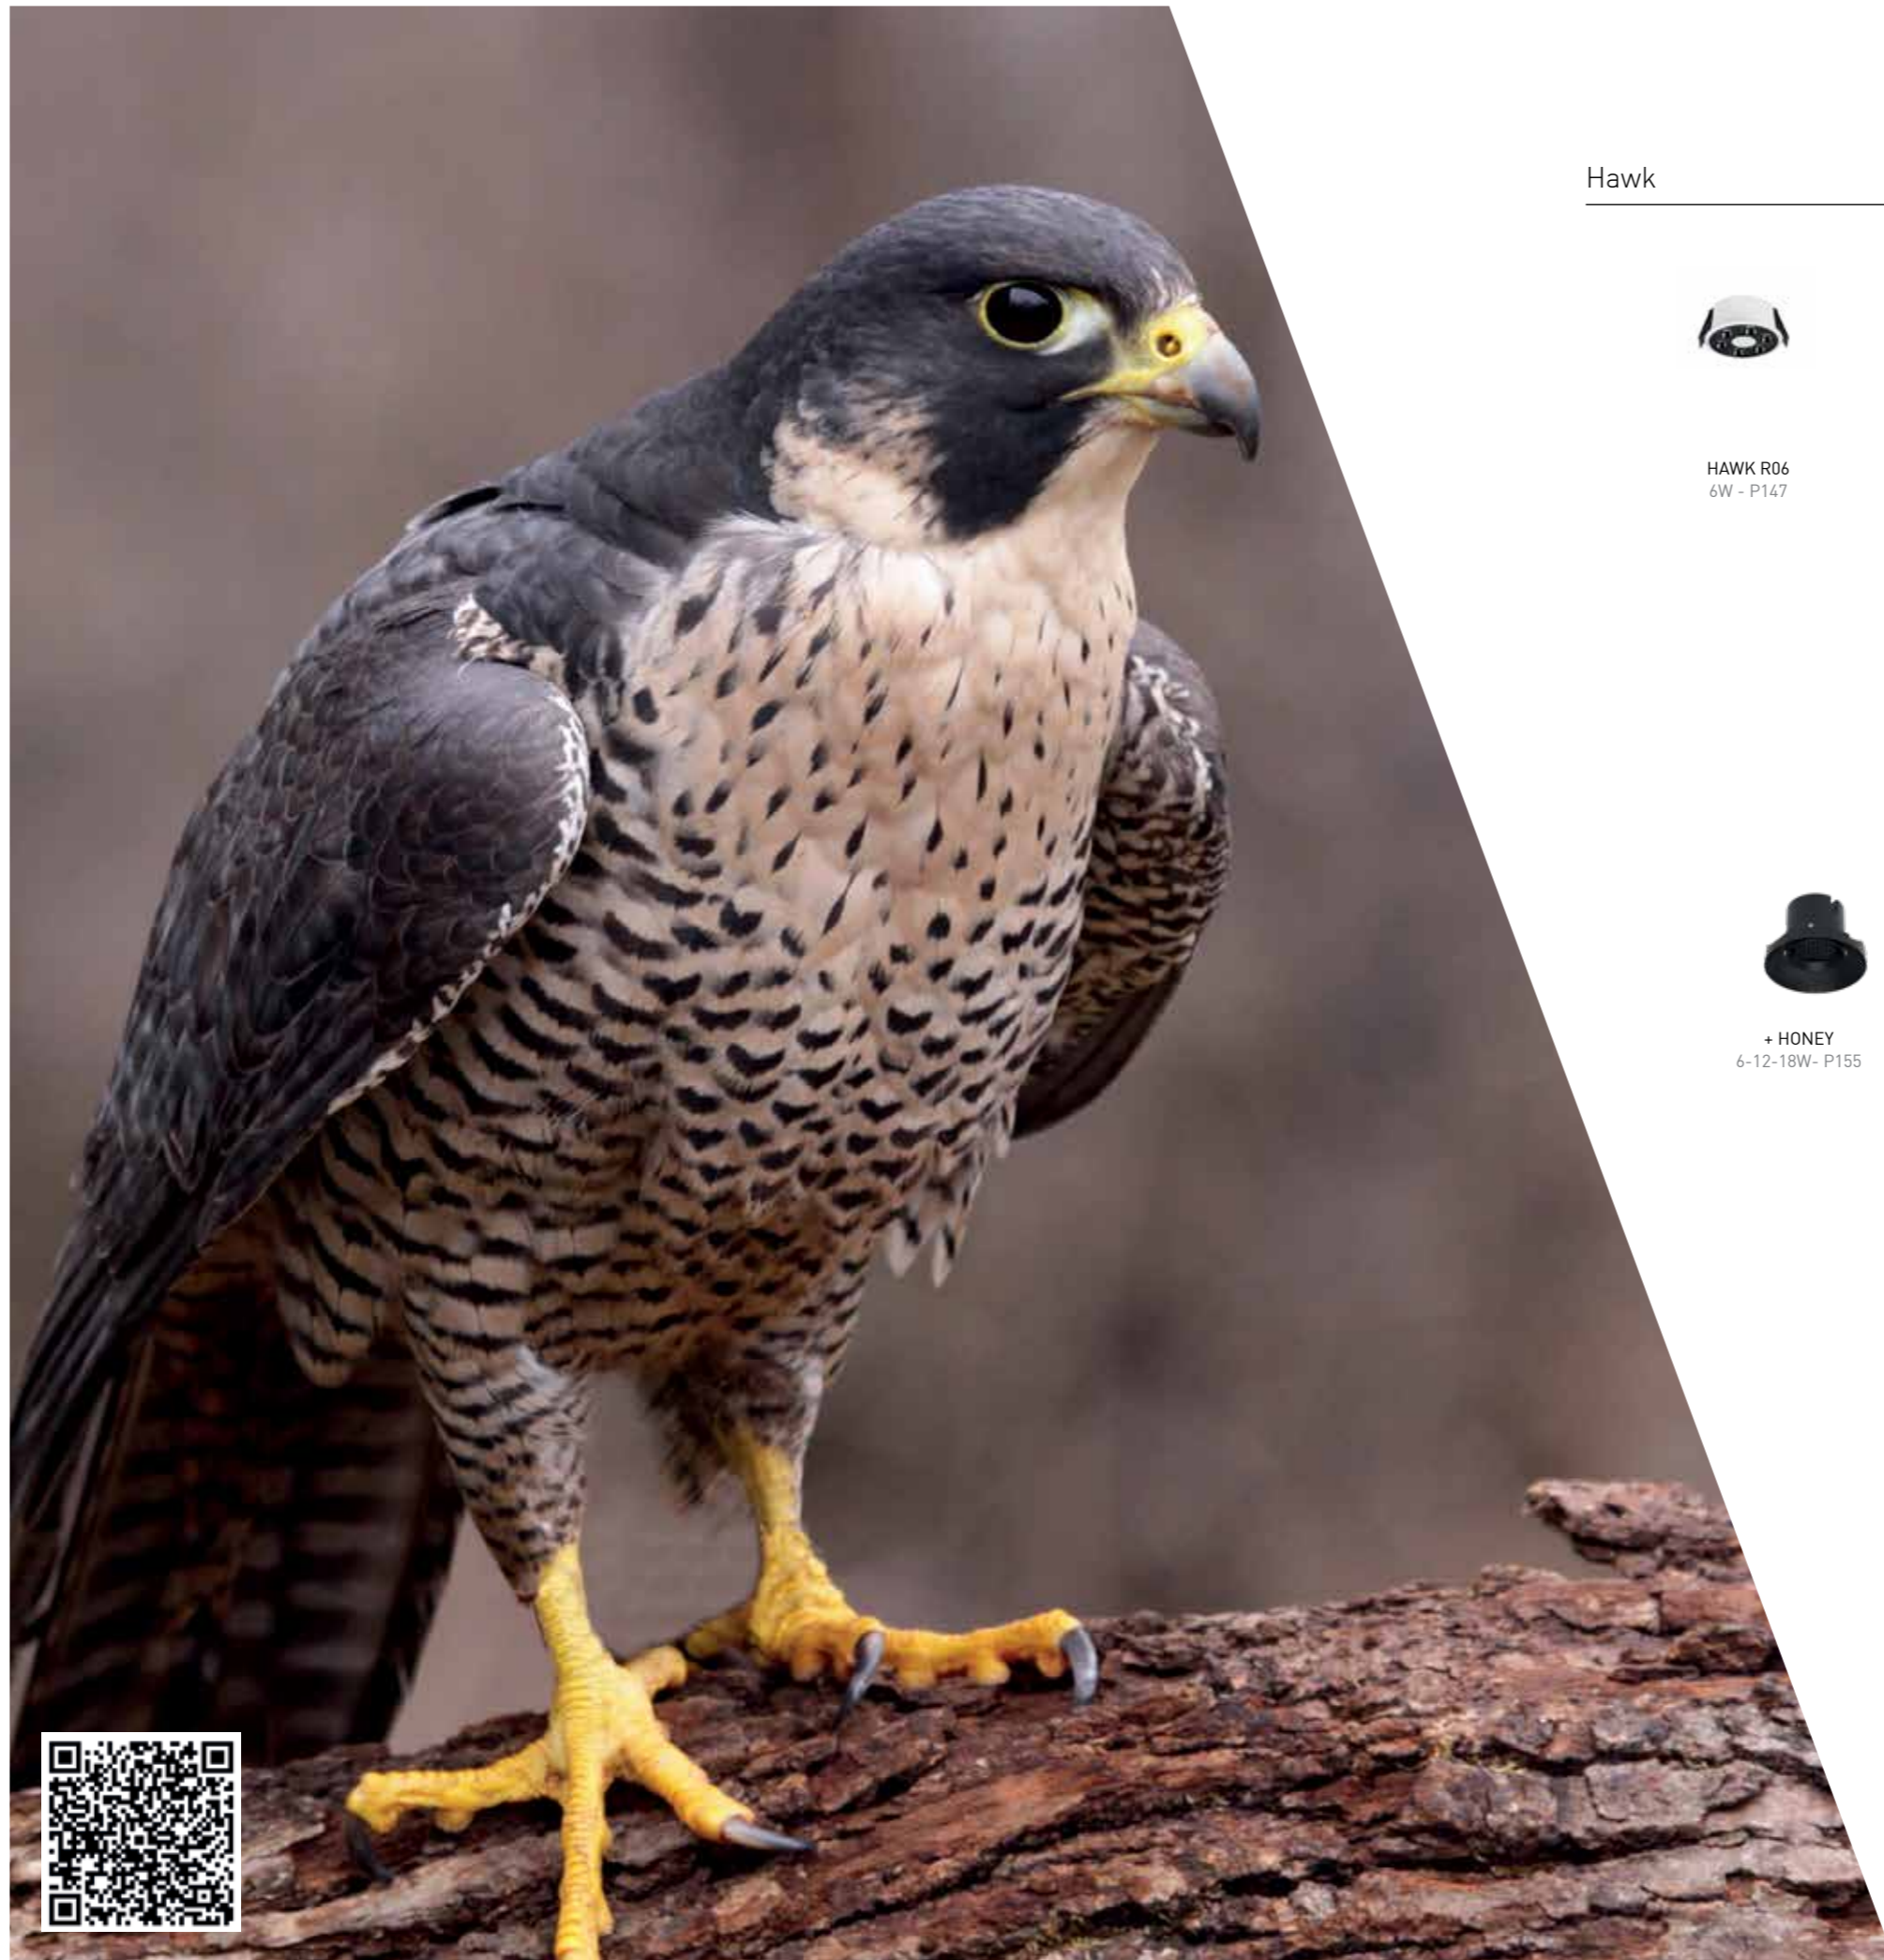

Hawk



HAWK R06
6W - P147



HAWK R12
12W - P147



HAWK R18
18W - P149



HAWK R24
24W - P149



HAWK S12
12W - P162



HAWK S18
18W - P163



HAWK S24
24W - P163



+ HONEY
6-12-18W - P155



+ OPAL
6-12-18W - P157



+ DIRECTIONAL
3-6-12W - P159



+ DOT
6-12-18W - P161

Nuestro modelo Hawk está inspirado en las alas de los halcones, en su estética, pero también en sus características. Un modelo fácilmente combinable que permite crear multitud de luminarias dentro de una sola.

Our Hawk model is inspired by the wings of falcons, in its aesthetics, but also in its characteristics. An easily combinable model that allows you to create a multitude of luminaires within a single one.

HAWK
DOTS








HAWK R06

7ID525 06 - 2 1 M 3 - 9001
1 2 3 4 5 6 7


1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID525	6W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	M- 38°	3 - 3000K 502 lm system 610 lm source	9001- Tec. White-Black

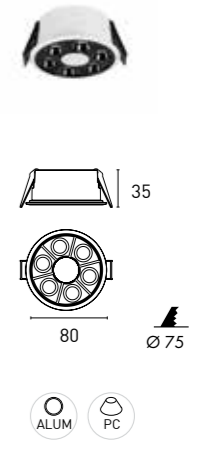

HAWK R12

7ID525 12 - 2 1 M 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID525	12W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	M- 38°	3 - 3000K 1024 lm system 1220 lm source	9001- Tec. White-Black

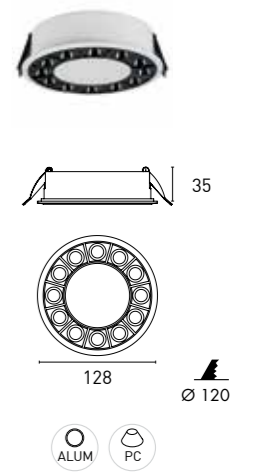

Accessories not included

Ref.	Cover Plate.	Honey	Ambience	Directional	Dots	Emergency Kit (page 322-323)
HAWK R06	HC7ID52506-01. Black HC7ID52506-90. Tec. White. <i>Included</i>	-	-	-	-	2DCLEDK1 2DCLEDK2
HAWK R12	HC7ID52512-01. Black HC7ID52512-90. Tec. White. <i>Included</i>	HC7ID52606-01. Black HC7ID52606-90. Tec. White	HC7ID52706	HC7ID52803	HC7ID52906	2DCLEDK5 2DCLEDK29






HAWK R18

7ID525 18 - 2 1 M 3 - 9001
1 2 3 4 5 6 7


1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID525	18W	2- ON/OFF 220-240V PF>0,95	1- 5 Years Warranty JISO driver Incl.	M- 38°	3 - 3000K 1585 lm system 1831 lm source	9001- Tec. White-Black

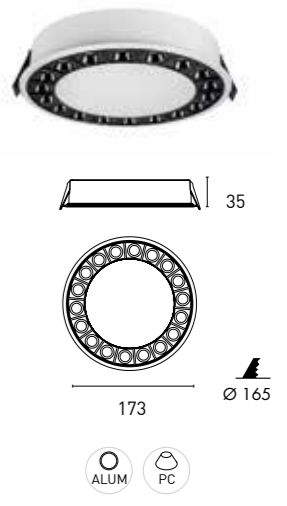

HAWK R24

7ID525 24 - 2 1 M 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID525	24W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	M- 38°	3 - 3000K 1910 lm system 2441 lm source	9001- Tec. White-Black

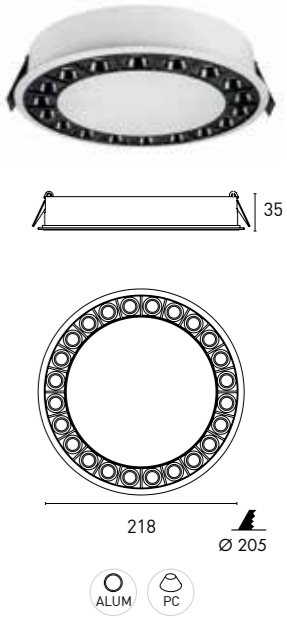


Accessories not included


Ref.	Cover Plate.	Honey	Ambience	Directional	Dots	Emergency Kit <i>(page 322-323)</i>
HAWK R18	HC7ID52518-01. Black HC7ID52518-90. Tec. White. <i>Included</i>	HC7ID52612-01. Black HC7ID52612-90. Tec. White	HC7ID52712	HC7ID52806	HC7ID52912	2DCLEDK5 2DCLEDK29
HAWK R24	HC7ID52524-01. Black HC7ID52524-90. Tec. White. <i>Included</i>	HC7ID52618-01. Black HC7ID52618-90. Tec. White	HC7ID52718	HC7ID52812	HC7ID52918	2DCLEDK5 2DCLEDK29



The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com



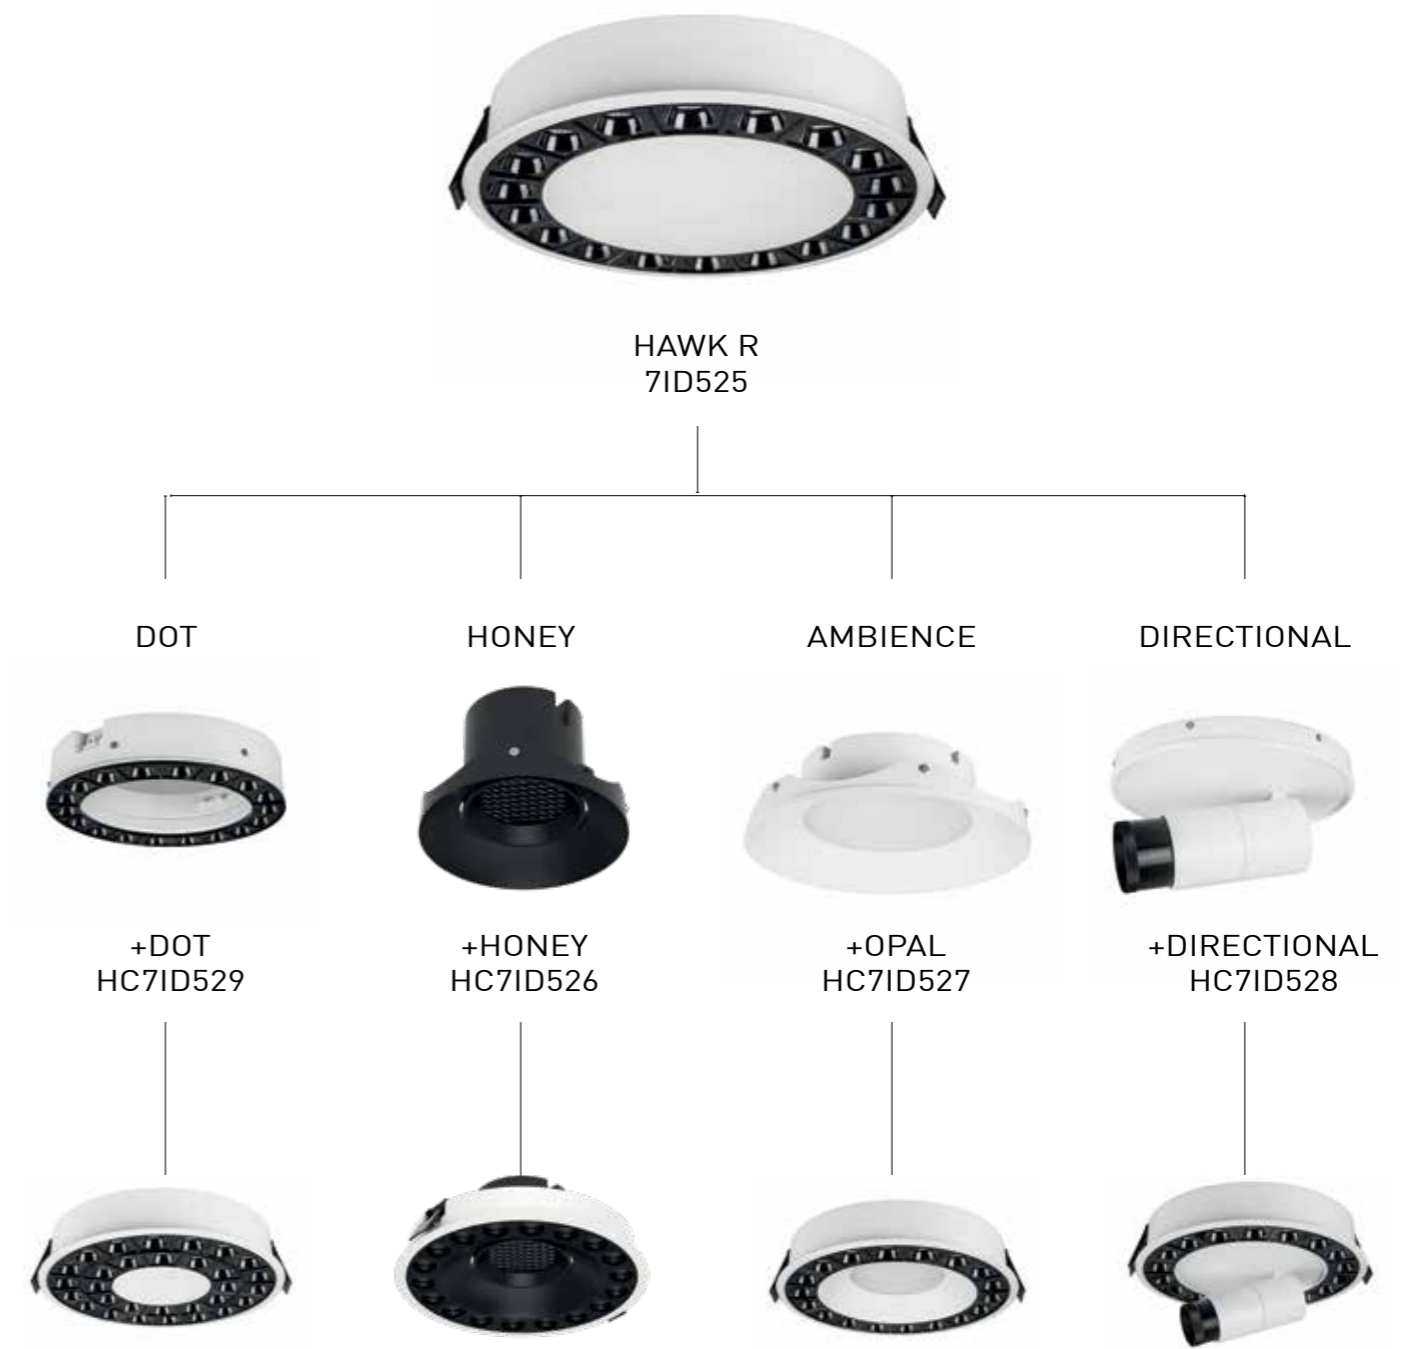




HC7ID526 06 - 2 1 M 3 - 9001

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
HC7ID526	6W	2- ON/OFF 220-240V PF>0,90	1- 5 Years Warranty JISO driver Incl.	M- 38°	3 - 3000K 506 lm source	0101 - Black 9001 - Tec. White-Black


+HONEY 06



HC7ID526 12 - 2 1 M 3 - 9001

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
HC7ID526	12W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	M- 38°	3 - 3000K 1112 lm source	0101 - Black 9001 - Tec. White-Black


+HONEY 12

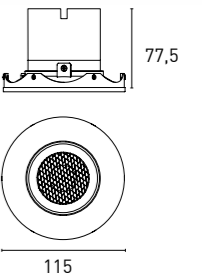

HC7ID526 18 - 2 1 M 3 - 9001

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
HC7ID526	18W	2- ON/OFF 220-240V PF>0,95	1- 5 Years Warranty JISO driver Incl.	M- 38°	3 - 3000K 1774 lm source	0101 - Black 9001 - Tec. White-Black

+HONEY 18

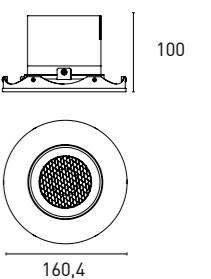




+ OPAL 06

HC7ID527 06 - 2 1 V 3 - 9001


1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
HC7ID527	6W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	V - 120°	3 - 3000K 503 lm system 680 lm source	9001- Tec. White-Black

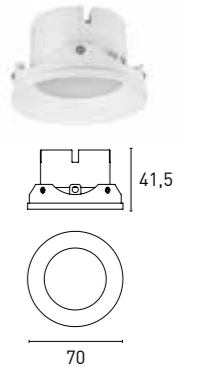

+ OPAL 12

HC7ID527 12 - 2 1 V 3 - 9001


1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
HC7ID527	12W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	V - 120°	3 - 3000K 1047 lm system 1361 lm source	9001- Tec. White-Black

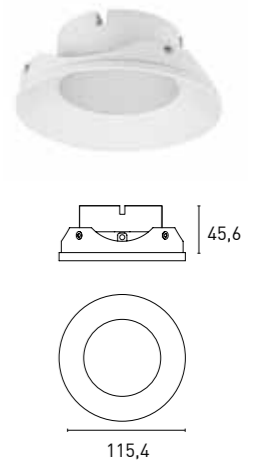


+ OPAL 18

HC7ID527 18 - 2 1 V 3 - 9001

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
HC7ID527	18W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	V - 120°	3 - 3000K 1628 lm system 2041 lm source	9001- Tec. White-Black

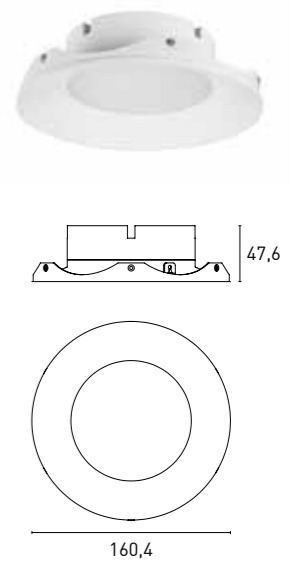

The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com

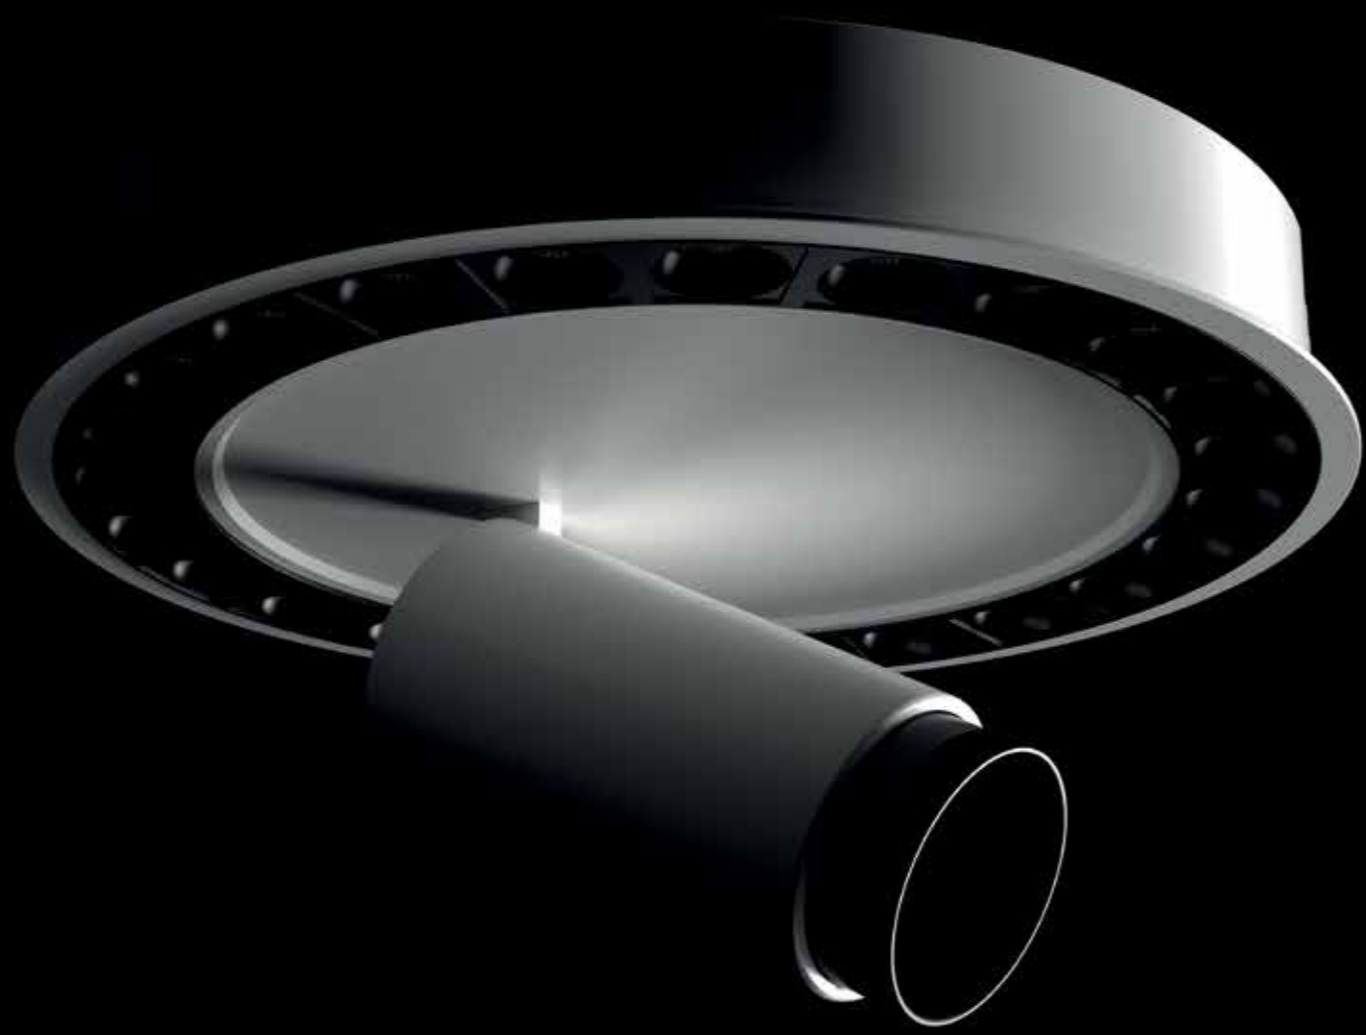

+ DIRECTIONAL 03

HC7ID528 03 - 2 1 3 3 - 9001
1 2 3 4 5 6 7


1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
HC7ID528	3W	2- ON/OFF 220-240V PF>0,5	1- 5 Years Warranty JISO driver Incl.	3 - Zoom 20°-50°	3 - 3000K 292 lm source	9001- Tec. White-Black



+ DIRECTIONAL 06

HC7ID528 06 - 2 1 3 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
HC7ID528	6W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	3 - Zoom 20°-50°	3 - 3000K 506 lm source	9001- Tec. White-Black

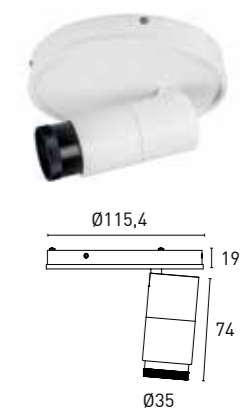

+ DIRECTIONAL 12

HC7ID528 12 - 2 1 3 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
HC7ID528	12W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	3 - Zoom 20°-50°	3 - 3000K 1112 lm source	9001- Tec. White-Black






+ DOT 06

HC7ID529 06 - 2 1 M 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
HC7ID529	6W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	M- 38°	3 - 3000K 610 lm source	9001- Tec. White-Black





70,4

+ DOT12

HC7ID529 12 - 2 1 M 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
HC7ID529	12W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	M- 38°	3 - 3000K 1220 lm source	9001- Tec. White-Black





115,4

+ DOT 18

HC7ID529 18 - 2 1 M 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
HC7ID529	18W	2- ON/OFF 220-240V PF>0,95	1- 5 Years Warranty JISO driver Incl.	M- 38°	3 - 3000K 1831 lm source	9001- Tec. White-Black



160,4




The above information is basic. For updated and more accurate information, please consult Technical Data Sheet on www.jisoiluminacion.com



HAWK S12

7ID225 12 - 2 1 M 3 - 9001
1 2 3 4 5 6 7

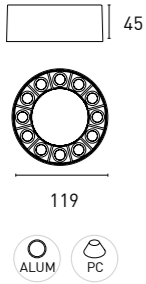


1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID225	12W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	M- 38°	3 - 3000K 1024 lm system 1220 lm source	0101 - Black 9001- Tec. White-Black



HAWK S18

7ID225 18 - 2 1 M 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID225	18W	2- ON/OFF 220-240V PF>0,95	1- 5 Years Warranty JISO driver Incl.	M- 38°	3 - 3000K 1585 lm system 1831 lm source	0101 - Black 9001- Tec. White-Black

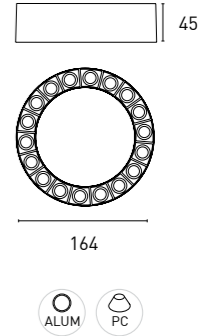


Surface



HAWK S24

7ID225 24 - 2 1 M 3 - 9001
1 2 3 4 5 6 7

1 - Model	2 - Power	3 - Power Supply	4 - Warranty	5 - Degree	6 - K	7 - Color
7ID225	24W	2- ON/OFF 220-240V PF>0,9	1- 5 Years Warranty JISO driver Incl.	M- 38°	3 - 3000K 1910 lm system 2441 lm source	0101 - Black 9001- Tec. White-Black

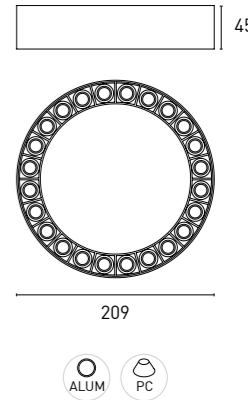

COVER PLATE

Code - Black	Code - Technical White	Model	Size
HCD2512-01	HCD2512-90	HAWK S12	Ø 70,4
HCD2518-01	HCD2518-90	HAWK S18	Ø 115,4
HCD2524-01	HCD2524-90	HAWK S24	Ø 160,4

