



Klauke

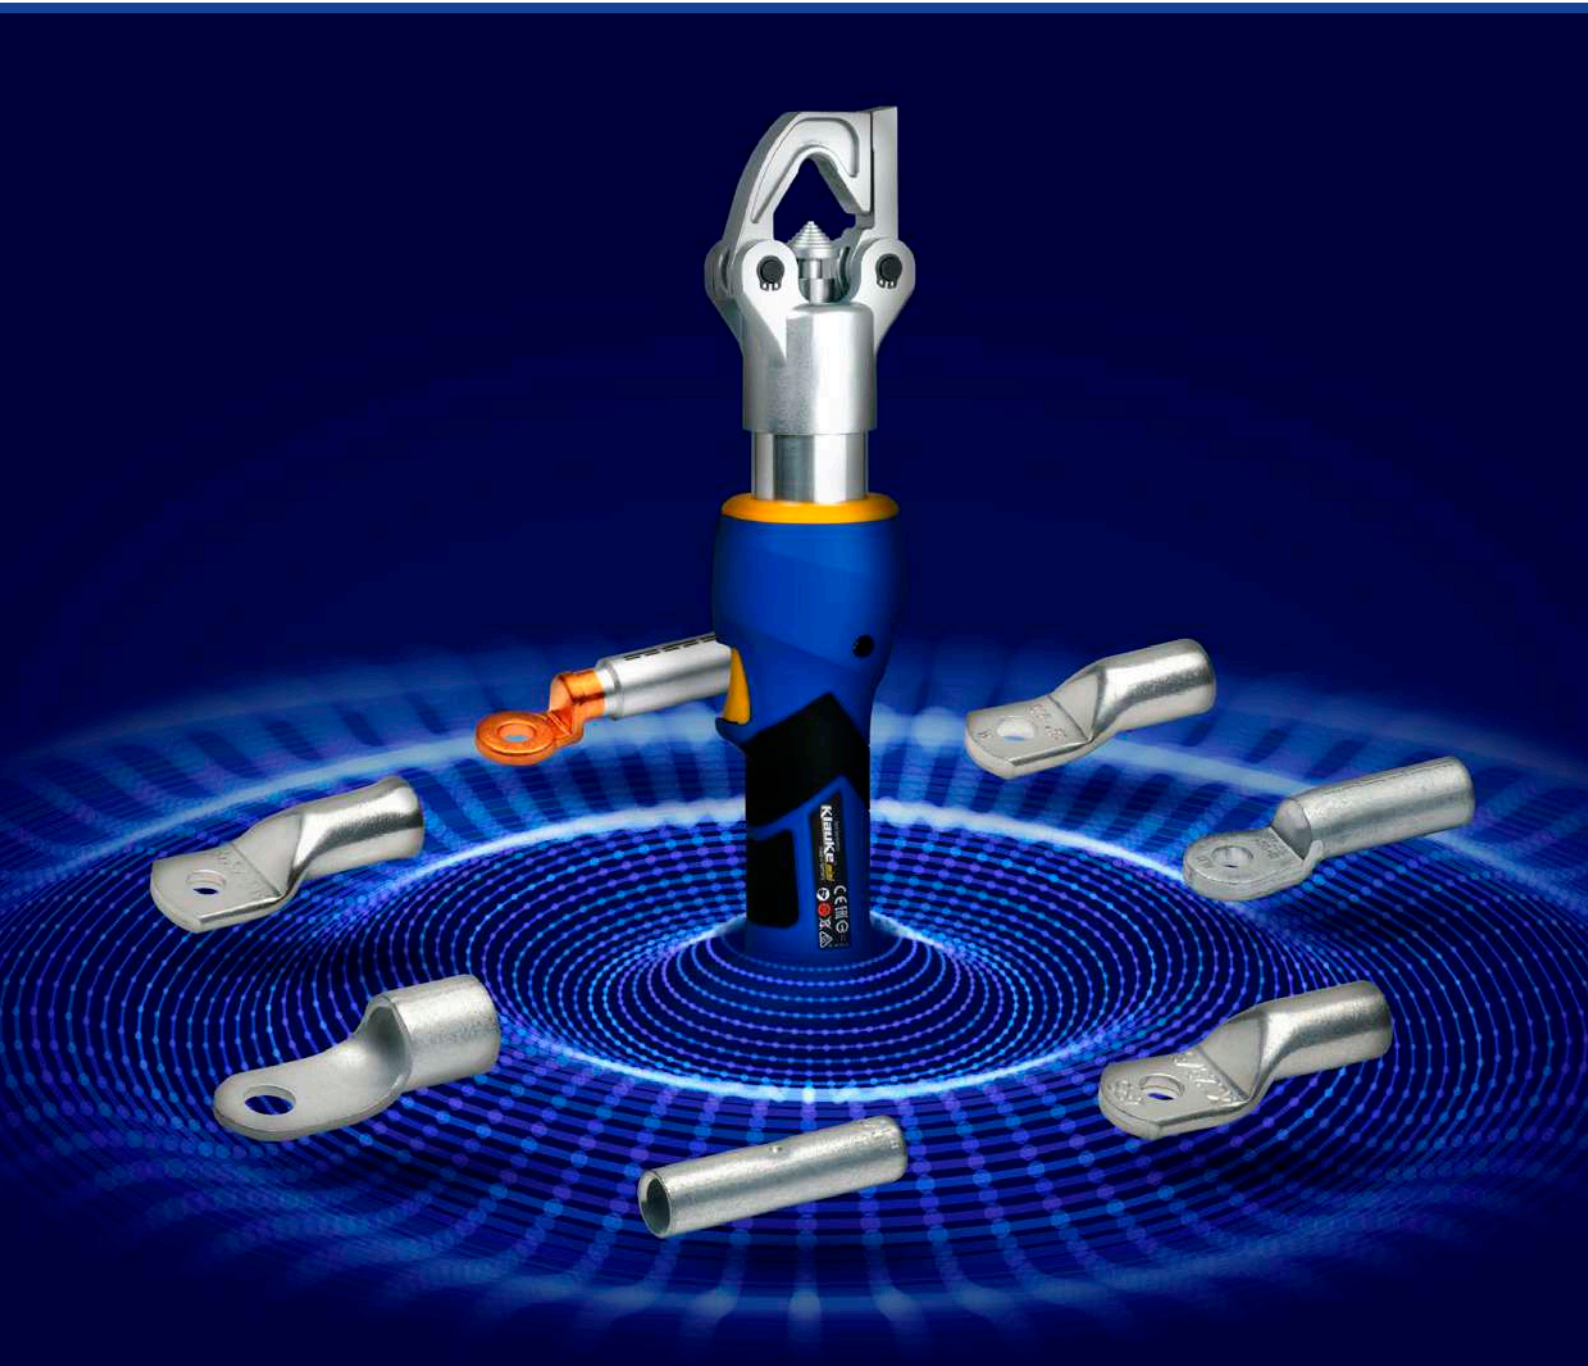

KLAUKE ID-CRIMPING

The smart solution without changing dies

EKM 60 ID

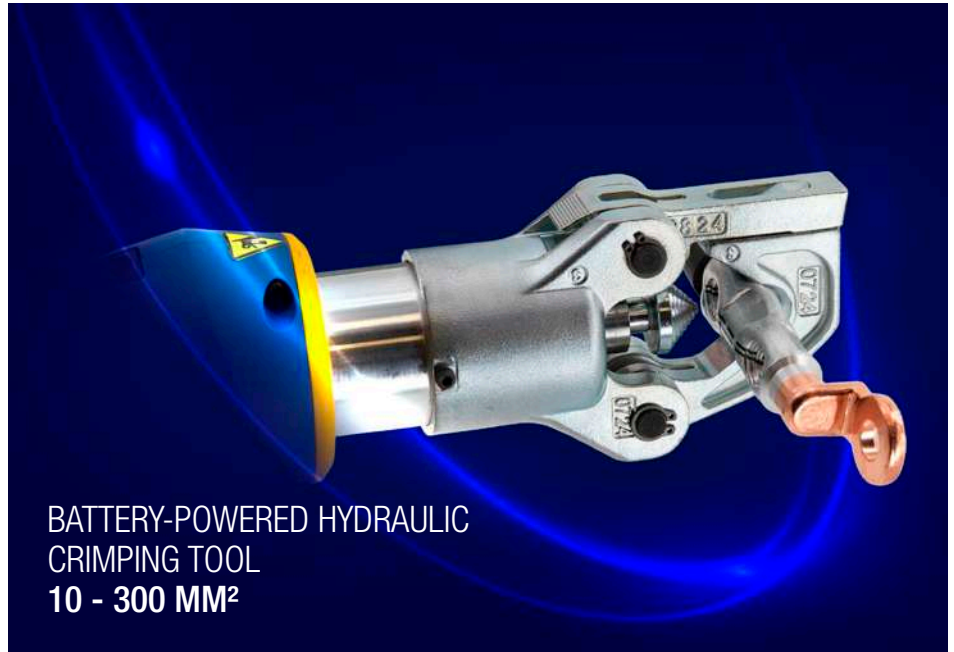




**BATTERY-POWERED HYDRAULIC
CRIMPING TOOL
10 - 300 mm²**

THE CRIMP TOOL THAT THINKS FOR ITSELF


In order to cover the large cross-section range from 10 to 300 mm² with just a single tool, the crimp head is equipped with a patented 2-stage telescopic cylinder: The innovative system initially crimps with the maximum force of 60 kN (> 6 t), then with less force in the second stage. The depth and profile of the crimp automatically match the processed cross-section thanks to the indent crimping method.

Crimping range Cu	10 - 300 mm ²
Crimping range Al	50 - 240 mm ²
Crimping force	30 - 60 kN
Crimping time	2 - 7 s
Rotatable crimp head	360°
Battery charging time	15 Min.
Weight incl. battery	2,5 kg
Ambient temp.	-10 to +40 °C
Lighting	LED
Interface	Bluetooth


Article	Klauke EKM 60 ID with Bosch battery	Klauke EKM 60 ID with Makita battery
	EKM60IDCFB	EKM60IDCFM
Klauke case	LBOXXEK-M60IDCFB	LBOXXEK-M60IDCFM
	L-BOXX	

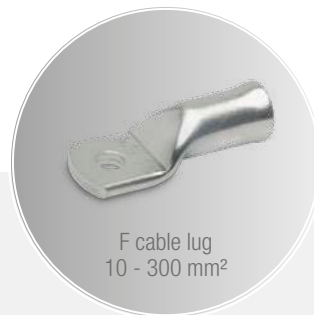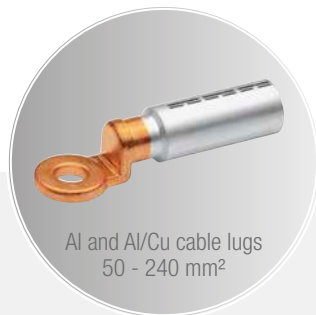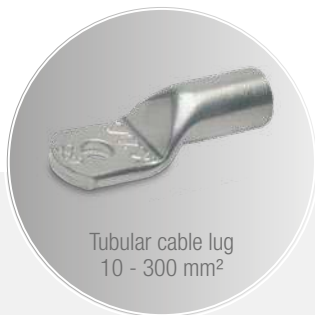


A RELIABLE CONNECTION EVERY TIME




Multi-stranded conductors




Multi-stranded compacted conductors



Fine-stranded conductor



Fine-stranded compacted conductor



Superfine stranded conductors

EK 30 IDML



**SMALLER, LIGHTER,
AND JUST AS EASY TO USE**

The EK30IDML is the perfect tool for anyone who wants to crimp a wide range of cable lugs with minimal effort. The EK30IDML uses the familiar indent crimping method. A change of dies is therefore not required and makes it possible to work quickly even with different applications.





Crimping range Cu	6 - 120 mm ² *
Stroke / opening width	22 mm
Crimping force	30 kN
Crimping time	2,5 - 5 s
Rotatable crimp head	350°
Battery charging time	40 Min.
Weight incl. battery	1,95 kg
Ambient temp.	-10 to +40 °C
Lighting	LED


Article	Art-Nr.
Battery-powered hydraulic crimping tool 6 - 120 mm ² *	EK30IDML




* Crimp cable lugs up to 95 mm²

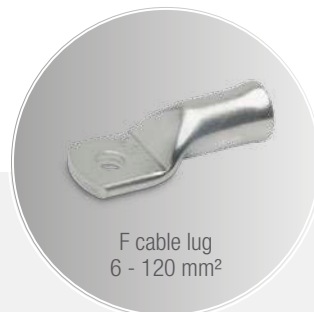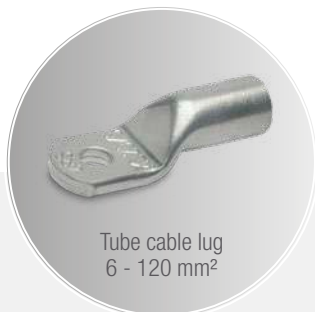


A RELIABLE CONNECTION EVERY TIME




Multi-stranded conductors



Multi-stranded compacted conductors



Fine-stranded conductor



Superfine stranded conductors



RIDGID

GREENLEE

Klauke

To receive up-to-date information on our products, services and promotional campaigns, register for our Newsletter here:

KLAUKE.COM/NEWSLETTER



Follow us!



© 2025 Gustav Klauke GmbH. All rights reserved. The Klauke logo and the Emerson logo are registered trademarks of Emerson Electric Co. or its subsidiaries in the USA and other countries. All other marks belong to their respective owners. Subject to change without notification. BRINDENTEN 11/25 |

Klauke

Gustav Klauke GmbH
Auf dem Knapp 46
D-42855 Remscheid

Phone: +49 (0) 2191 / 907 - 0
Klauke-Info@Emerson.com
Klauke.com

EMERSON